



C2000 Mesh Filters

| 22-1/8" Depth, 6" High                                                                              | MODEL                                                                                                   |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>750± CFM</li> <li>7" Round Duct</li> </ul>                   | C2030PS-SS<br>C2036PS-SS<br>C2042PS-SS<br>C2048PS-SS                                                    |
| <ul style="list-style-type: none"> <li>900± CFM</li> <li>8" Round Transition</li> </ul>             | C2030PS-8-SS<br>C2036PS-8-SS<br>C2042PS-8-SS<br>C2048PS-8-SS                                            |
| <ul style="list-style-type: none"> <li>1000± CFM</li> <li>10" Round Transition</li> </ul>           | C2030PS-K-SS<br>C2036PS-K-SS<br>C2042PS-K-SS<br>C2048PS-K-SS                                            |
| <ul style="list-style-type: none"> <li>1270± CFM</li> <li>Two 7" Round Ducts</li> </ul>             | C2036PS1-TW-SS<br>C2042PS1-TW-SS<br>C2048PS1-TW-SS<br>C2054PS1-TW-SS<br>C2060PS1-TW-SS                  |
| <ul style="list-style-type: none"> <li>1520± CFM .</li> <li>Two 8" Round Transitions</li> </ul>     | C2036PS1-TW-8-SS<br>C2042PS1-TW-8-SS<br>C2048PS1-TW-8-SS<br>C2054PS1-TW-8-SS<br>C2060PS1-TW-8-SS        |
| 18-1/8" Depth, 6" High                                                                              | MODEL                                                                                                   |
| <ul style="list-style-type: none"> <li>635± CFM</li> <li>7" Round Duct, 4.25" Off Center</li> </ul> | C2030BP1-SS<br>C2036BP1-SS<br>C2042BP1-SS                                                               |
| <ul style="list-style-type: none"> <li>735± CFM</li> <li>7" Round Duct</li> </ul>                   | C2030BP-SS<br>C2036BP-SS<br>C2042BP-SS<br>C2048BP-SS                                                    |
| <ul style="list-style-type: none"> <li>880± CFM</li> <li>8" Round Transition</li> </ul>             | C2030BP-8-SS<br>C2036BP-8-SS<br>C2042BP-8-SS<br>C2048BP-8-SS                                            |
| <ul style="list-style-type: none"> <li>990± CFM</li> <li>10" Round Transition</li> </ul>            | C2030BP-K-SS<br>C2036BP-K-SS<br>C2042BP-K-SS<br>C2048BP-K-SS                                            |
| <ul style="list-style-type: none"> <li>1250± CFM</li> <li>Two 7" Round Ducts</li> </ul>             | <b>C2036BP1-TW-SS</b><br>C2042BP1-TW-SS<br>C2048BP1-TW-SS<br>C2054BP1-TW-SS<br>C2060BP1-TW-SS           |
| <ul style="list-style-type: none"> <li>1500±</li> <li>Two 8" Round Transitions</li> </ul>           | <b>C2036BP1-TW-8-SS</b><br>C2042BP1-TW-8-SS<br>C2048BP1-TW-8-SS<br>C2054BP1-TW-8-SS<br>C2060BP1-TW-8-SS |

## FEATURES:

- Variable Controls
- Sones: 1.5 to 4.6
- Filters: Aluminum Mesh
- Front Panel Lighting: LED bulbs Included.
  - 30" to 48" Hoods take 2 Bulbs (1 Set)
  - 54" to 60" Hoods take 4 Bulbs (2 Sets)
- Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- Suggested Distance Codes: 36" above cooking surface.

## OPTIONS:

- Flange for the perfect fit. See accessories.
- Transition, see accessories.
- Remote wiring, see accessories.
- Island Application available. Call for a quote.

NO Performance Warranty over BBQ Grills/Griddles.

## TRANSITION



Example: C2036PS-8

Vent Size 8" Round x 3-1/2" High

Example: C2042BP-K

Vent Size 10" Round x 7" High

## Ventilator Insert Specifications

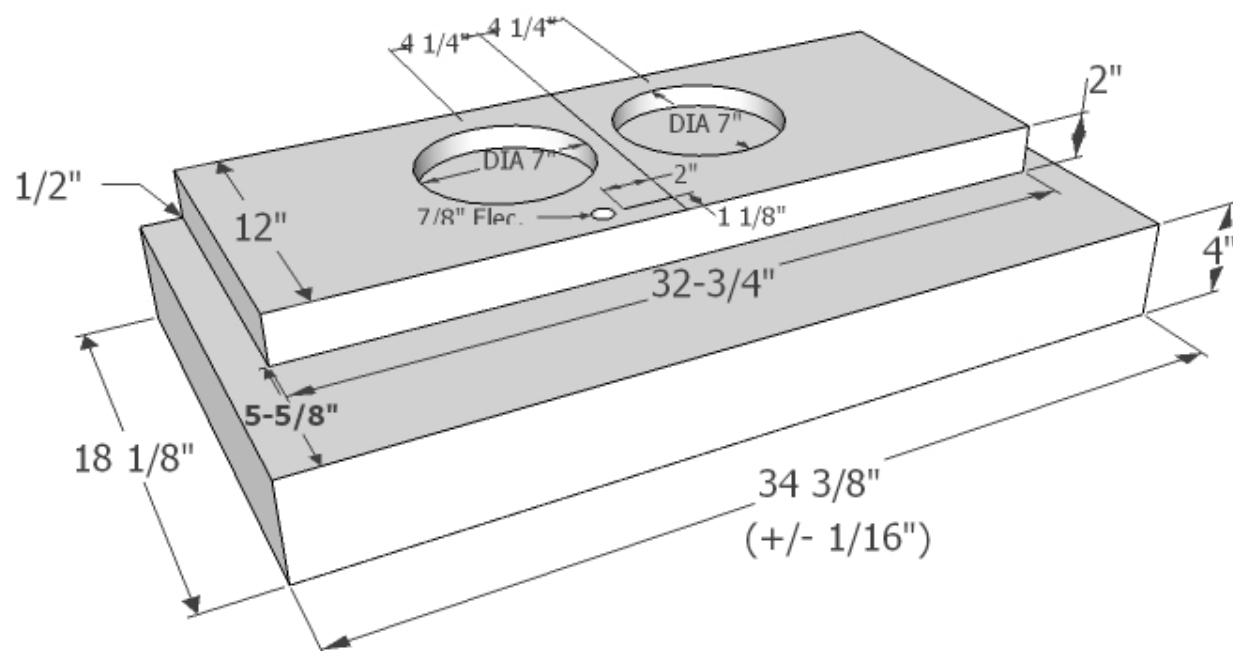

8" Transition  
8" Round x 3-1/2" high

**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!**

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.