

IMPERIAL KITCHEN VENTILATION



Dealer Product Catalog

American Made Since 1961



Why Choose Imperial

- ◆ 7 Year Warranty on Parts & Labor...Best in the Industry.
 - ◆ Made in California.
- ◆ Exceptional customer service.
 - ◆ In business since 1961.
 - ◆ Simple Installation.
- ◆ Custom pieces in as little as 4 weeks.
 - ◆ Employee owned.
 - ◆ Availability.
 - ◆ Variety of Styles.
 - ◆ Reliability.

NOW THE QUESTION IS: "Why NOT Choose Imperial."

About Imperial

Imperial Cal. Products, Inc. was founded in 1961 by Frank Flentye. Frank began making economy range hoods in his San Fernando Valley, CA garage. The company started out in Van Nuys, CA, in a 1000 square foot building. With Frank and a few part-time college students, the company was able to produce 500 economy hoods a month. Soon the demand for quality high-end models was exceeding their manufacturing abilities. Frank and his employees began hand-crafting a number of high-end models and styles. More product demand required more space and a larger work force. In 1973, after 10 years in the San Fernando Valley/ Burbank area, the company moved to Orange County. Imperial relocated to a 35,000 square foot plant in Brea, California. It is here that approximately 900 variations of the nine different groups and styles of range hoods are produced by 35 employees. The increase in the demand for Imperial products is due to three main factors; our emphasis on quality, performance, and customer service. Our focus in these three areas has resulted in our steady growth. In 2004, Frank Flentye turned the company over to his employees. Imperial has an ESOP program where the employees enjoy ownership in the company along with the pride of watching Imperial expand. Although once exclusively based in Southern California, the company has expanded sales Nationwide.



Power Choices	Page 1
Filter Choices	Page 2

Powered Liner Series

Powered Liner ~ Wall Application—Baffle Filters	Page 3
Powered Liner ~ Wall Application—Mesh Filters	Page 5

Island Series

Island Pyramid	Page 9
Island Slim Line	Page 11
Contemporary Island Slim Line	Page 13
Ceiling Mount Island	Page 15

Wall Mount Series

Wall Mount & Outdoor Series	Page 17
Wall Pyramid	Page 21
Wall Contemporary Styles	Page 25

Under Cabinet Series

Select 10	Page 27
Slim Line	Page 29
Flush Mount	Page 33

Recycling Cabinet	Page 37
-------------------	---------

Miscellaneous


Accessories	Page 39
Remote Wiring	Page 40
Ducting Considerations/Custom Stack & Duct Cover Height Calculations	Page 41

800.851.4192 ~ www.imperialhoods.com

7 YEAR WARRANTY—BEST IN THE INDUSTRY

Imperial Kitchen Ventilation

Picture Index

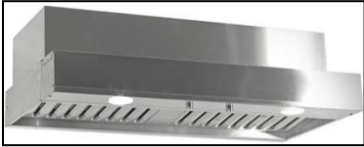VENTILATOR INSERT		PAGE 3-8
ISLAND PYRAMID		PAGE 9
ISLAND SLIM LINE		PAGE 11
CONTEMPORARY ISLAND		PAGE 13
CEILING MOUNT ISLAND		PAGE 15
WALL MOUNT		PAGE 17-19
OUTDOOR WALL MOUNT		PAGE 17-19
WALL PYRAMID		PAGE 21-24
WALL MOUNT CONTEMPORARY		PAGE 25

Imperial Kitchen Ventilation

Picture Index

SELECT 10		PAGE 27
SLIM LINE		PAGE 29-32
FLUSH MOUNT		PAGE 33-36
RECYCLING CABINET		PAGE 37
ACCESSORIES		PAGE 39
NON-VENT KIT		PAGE 39
REMOTE WIRING & DUCTING CONSIDERATIONS & DUCT HEIGHT CALCULATIONS		PAGE 40 - 41



**SINGLE BALANCED CENTRIFUGAL BLOWER
WITH "FREE-AIR" CHAMBER**

BP1 - 635 CFM - VARIABLE SPEED MOTOR REQUIRES (1) 7" ROUND DUCT
Recommended for Standard Residential Cooking With A
Four or Five Burner Cooking Surface. Also with (30") and Select (36")
Professional Style Ranges.



**DUAL BALANCED CENTRIFUGAL BLOWERS
WITH "FREE-AIR" CHAMBER
(Two Single Blowers JOINED Together Into ONE Exit)**

BP 735 CFM & PS - 750 CFM - VARIABLE SPEED MOTOR REQUIRES
(1) 7" ROUND DUCT
Recommended for Use With Six Burner (36") Professional Style Ranges.



**TWIN (TW) CENTRIFUGAL BLOWERS
WITH "FREE-AIR" CHAMBERS
(Two Single Blowers with TWO Separate Exits)**

PS1-TW—1270 CFM
BP1-TW - 1250 CFM
VARIABLE CONTROL MOTORS REQUIRES (2) 7" ROUND DUCTS
Recommended With Larger (48"+) Professional Style Ranges.



SD2



SD4

AIR-RING MOTORS

SD2 - 360 CFM - TWO SPEED MOTOR
SD4 - 435 CFM - VARIABLE SPEED MOTOR
REQUIRES (1) 7" ROUND DUCT

Recommended for Standard Residential
Cooking With A Four or Five Burner
Cooking Surface.



Stainless Steel Baffle

Set Includes:

- 1 Grease Tray
 - 1 Center Panel
 - 1 Set of 2 Baffle Filters
- (54" & 60" include 2 sets/4 Filters)



Aluminum Mesh

Set Includes:

- Set of 2 Filters
- (Some models need 4 Filters)



Slim Baffle

Set Includes:

- Set of 2 Slim Baffles
- (Some models include 2 Sets/4 Filters)

BAFFLE FILTER CLEANING

To remove Baffle Filters, remove center panel by pulling panel toward the front of the hood, lift up to remove. Move filters to the center of the hood, pull baffle towards the front of the hood and lift out. To remove grease tray, slide tray to the top of the hood and lift out. Grease will accumulate in grease tray. Clean with hot water and polish with stainless steel cleaner.

ALUMINUM MESH & SLIM BAFFLE FILTER CLEANING

Clean filters often for the best performance. How often depends on cooking style. Use hot water and a degreaser to clean.

May be used in the dishwasher through the RINSE cycle ONLY. Some detergents and drying agents may discolor filters.

Slim Baffle, polish with stainless steel cleaner.



C2000 Baffle Series

FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.
 - 30" to 48" Hoods take 2 Bulbs (1 Set)
 - 54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- ◆ Remote location wiring, see page 40.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddles.

TRANSITION


Example: C2036PSB-8
Vent Size 8" Round x 3-1/2" High

Example: C2042BPB-K
Vent Size 10" Round x 7" High




22-1/8" Depth, 10" High	MODEL
◆ 635± CFM ◆ 7" Round Duct	C2030PSB-SS C2036PSB-SS C2042PSB-SS C2048PSB-SS
◆ 765± CFM ◆ 8" Round Transition	C2030PSB-8-SS C2036PSB-8-SS C2042PSB-8-SS C2048PSB-8-SS
◆ 850± CFM ◆ 10" Round Transition	C2030PSB-K-SS C2036PSB-K-SS C2042PSB-K-SS C2048PSB-K-SS
◆ 1080± CFM ◆ Two 7" Round Ducts	C2036PS1-TWB-SS C2042PS1-TWB-SS C2048PS1-TWB-SS C2054PS1-TWB-SS C2060PS1-TWB-SS
◆ 1290± CFM ◆ Two 8" Round Transitions	C2036PS1-TWB-8-SS C2042PS1-TWB-8-SS C2048PS1-TWB-8-SS C2054PS1-TWB-8-SS C2060PS1-TWB-8-SS
18-1/8" Depth, 10" High	MODEL
◆ 540± CFM ◆ 7" Round Duct, 4.25" Off Center	C2030BP1B-SS C2036BP1B-SS C2042BP1B-SS
◆ 625± CFM ◆ 7" Round Duct	C2030BPB-SS C2036BPB-SS C2042BPB-SS C2048BPB-SS
◆ 750± CFM ◆ 8" Round Transition	C2030BPB-8-SS C2036BPB-8-SS C2042BPB-8-SS C2048BPB-8-SS
◆ 840± CFM ◆ 10" Round Transition	C2030BPB-K-SS C2036BPB-K-SS C2042BPB-K-SS C2048BPB-K-SS
◆ 1065± CFM ◆ Two 7" Round Ducts	C2036BP1-TWB-SS C2042BP1-TWB-SS C2048BP1-TWB-SS C2054BP1-TWB-SS C2060BP1-TWB-SS
◆ 1275± ◆ Two 8" Round Transitions	C2036BP1-TWB-8-SS C2042BP1-TWB-8-SS C2048BP1-TWB-8-SS C2054BP1-TWB-8-SS C2060BP1-TWB-8-SS


Ventilator Insert With Baffles, Specifications

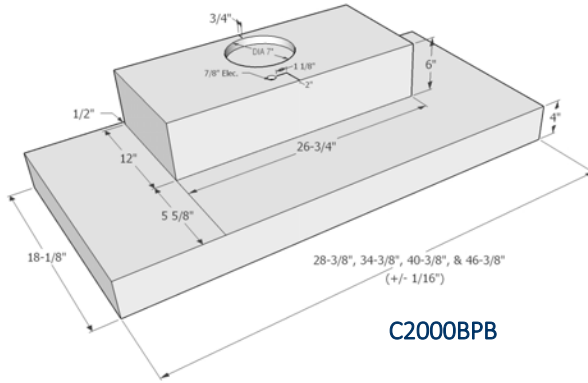


C2000BPB

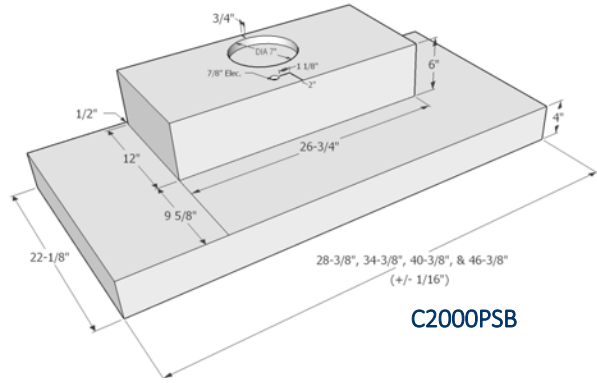


C2000PSB

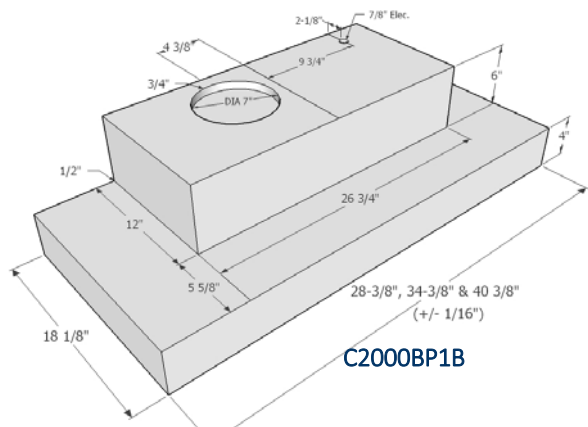


C2000BP1B

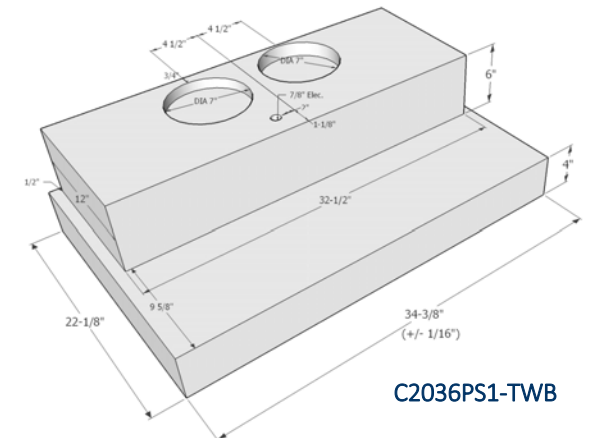


C2036PS1-TWB

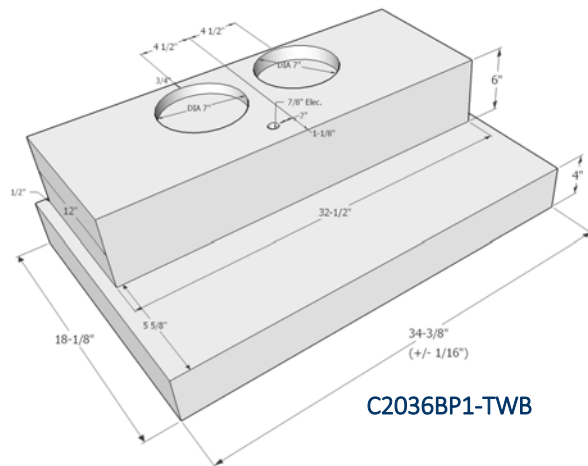


C2036BP1-TWB

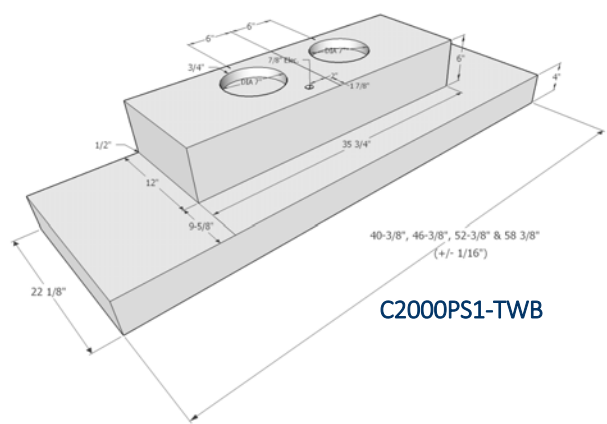

C2000PS1-TWB

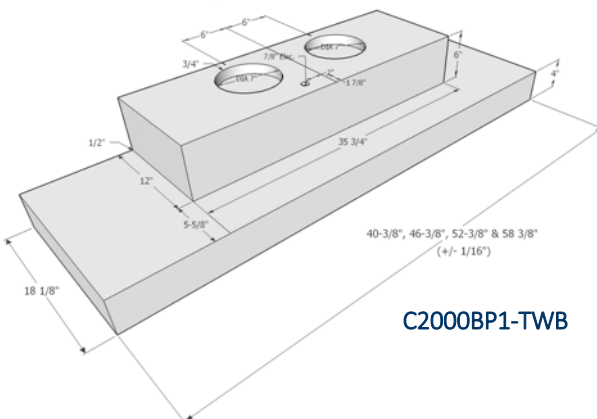

C2000BP1-TWB



**8" Transition
8" Round x 3-1/2" high**



**10" Transition
10" Round x 7-1/2" high**

**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE
BEST IN THE INDUSTRY!**

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.



C2000 Mesh Filters

22-1/8" Depth, 6" High	MODEL
750± CFM 7" Round Duct	C2030PS-SS C2036PS-SS C2042PS-SS C2048PS-SS
900± CFM 8" Round Transition	C2030PS-8-SS C2036PS-8-SS C2042PS-8-SS C2048PS-8-SS
1000± CFM 10" Round Transition	C2030PS-K-SS C2036PS-K-SS C2042PS-K-SS C2048PS-K-SS
1270± CFM - Two 7" Round Ducts	C2036PS1-TW-SS C2042PS1-TW-SS C2048PS1-TW-SS C2054PS1-TW-SS C2060PS1-TW-SS
1520± CFM . - Two 8" Round Transitions	C2036PS1-TW-8-SS C2042PS1-TW-8-SS C2048PS1-TW-8-SS C2054PS1-TW-8-SS C2060PS1-TW-8-SS
18-1/8" Depth, 6" High	MODEL
635± CFM 7" Round Duct, 4.25" Off Center	C2030BP1-SS C2036BP1-SS C2042BP1-SS
735± CFM 7" Round Duct	C2030BP-SS C2036BP-SS C2042BP-SS C2048BP-SS
880± CFM 8" Round Transition	C2030BP-8-SS C2036BP-8-SS C2042BP-8-SS C2048BP-8-SS
990± CFM 10" Round Transition	C2030BP-K-SS C2036BP-K-SS C2042BP-K-SS C2048BP-K-SS
1250± CFM - Two 7" Round Ducts	C2036BP1-TW-SS C2042BP1-TW-SS C2048BP1-TW-SS C2054BP1-TW-SS C2060BP1-TW-SS
1500± - Two 8" Round Transitions	C2036BP1-TW-8-SS C2042BP1-TW-8-SS C2048BP1-TW-8-SS C2054BP1-TW-8-SS C2060BP1-TW-8-SS

FEATURES:

- Variable Controls
- Sones: 1.5 to 4.6
- Filters: Aluminum Mesh
- Front Panel Lighting: LED bulbs Included.
 - 30" to 48" Hoods take 2 Bulbs (1 Set)
 - 54" to 60" Hoods take 4 Bulbs (2 Sets)
- Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- Flange for the perfect fit. See page 39.
- Remote location wiring, see page 40.
- Island Application available. Call for a quote.
- Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddles.

TRANSITION

Example: C2036PS-8


Vent Size 8" Round x 3-1/2" High

Example: C2042BP-K


Vent Size 10" Round x 7" High




Ventilator Insert Specifications

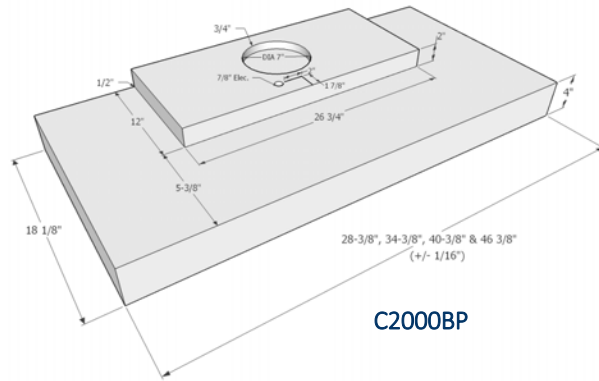


C2000BP

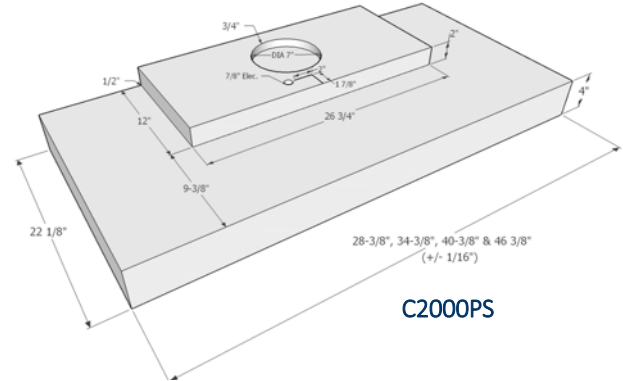


C2000PS

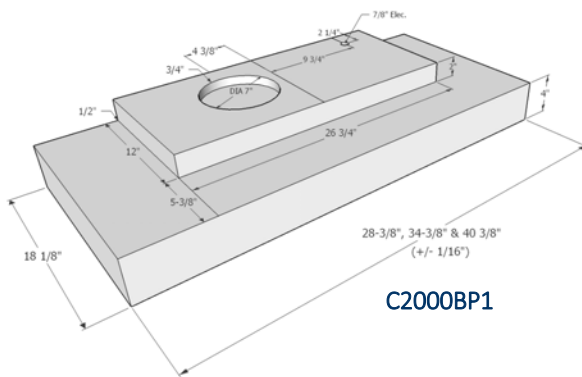


C2000BP1

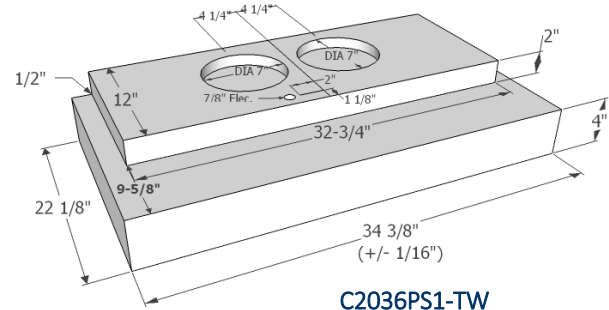


C2036PS1-TW

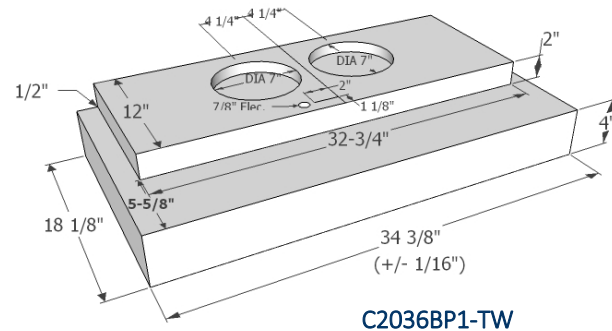


C2036BP1-TW

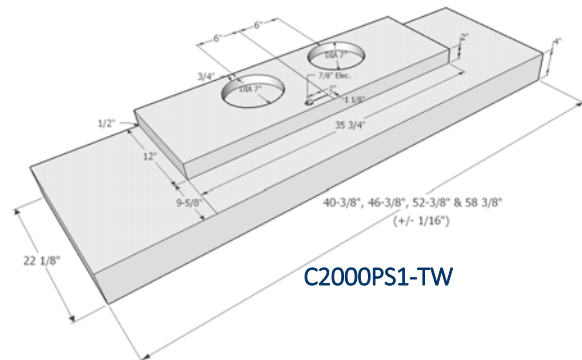

C2000PS1-TW

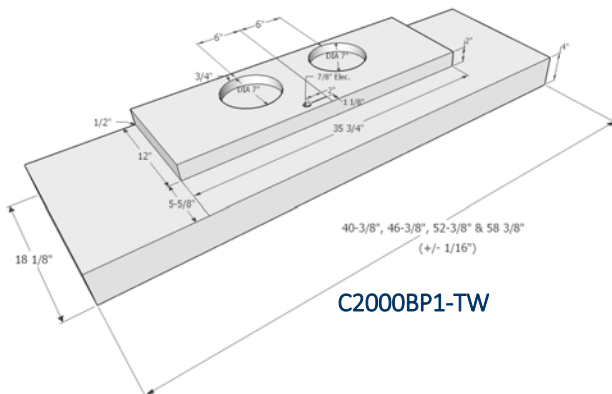

C2000BP1-TW



8" Transition
8" Round x 3-1/2" high



10" Transition
10" Round x 7-1/2" high


SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

18-1/8" Depth, 6" High	MODEL
◆ 360± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	C2030SD2-SS C2036SD2-SS C2042SD2-SS
◆ 435± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct	C2030SD4-SS C2036SD4-SS C2042SD4-SS C2048SD4-SS
12" Depth, 6" High	MODEL
◆ 435± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct	C2024SD4-12-SS C2030SD4-12-SS C2036SD4-12-SS C2042SD4-12-SS
18-1/8" Depth, 6" High Re-Circulating	MODEL
◆ Elbow Transition Included ◆ Charcoal Combo Filters	C2030SD2-NV-SS C2036SD2-NV-SS C2042SD2-NV-SS

Powered Liner —C2000 Air Ring Fan Slim Baffle Series

18-1/8" Depth, 6" High Slim Baffle	MODEL
◆ 390± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct C2000SD4SB is designed to meet the Builder Code of 400 CFMs without a make-up air kit.	C2030SD4SB-SS C2036SD4SB-SS C2042SD4SB-SS C2048SD4SB-SS
◆ 325± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	C2030SD2SB-SS C2036SD2SB-SS C2042SD2SB-SS

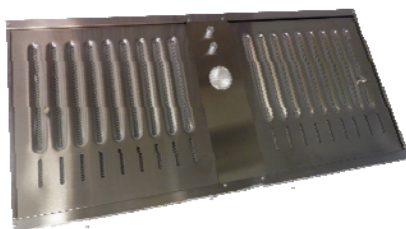

C2000SD4SB



C2000SD2



C2000SD4



C2000SD4-12

FEATURES:

- ◆ Variable or Rocker Controls.
- ◆ Center Panel Lighting: LED bulbs Included.
- ◆ Filters: Aluminum Mesh
- ◆ Filters: Slim Baffle
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 30" above cooking surface.




OPTIONS:

- ◆ Flange for the perfect fit. See page 39.
- ◆ Remote location wiring. See Page 40.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grill/Griddle.



Powered Liner Specifications

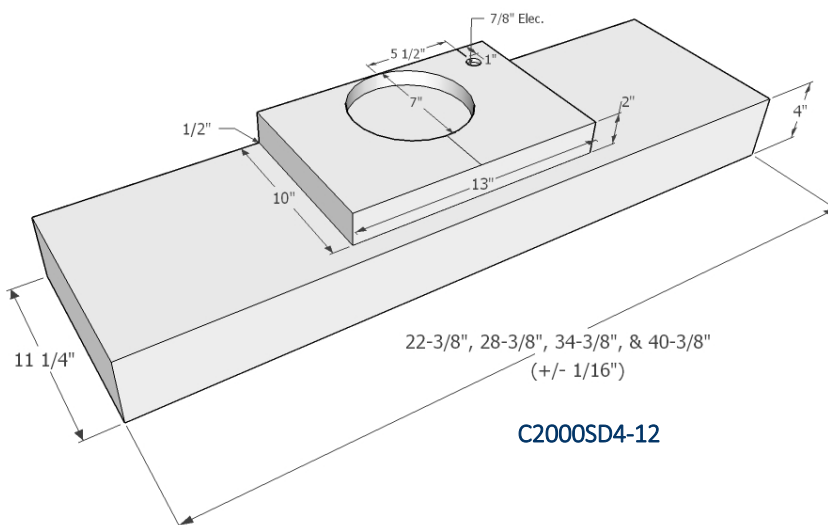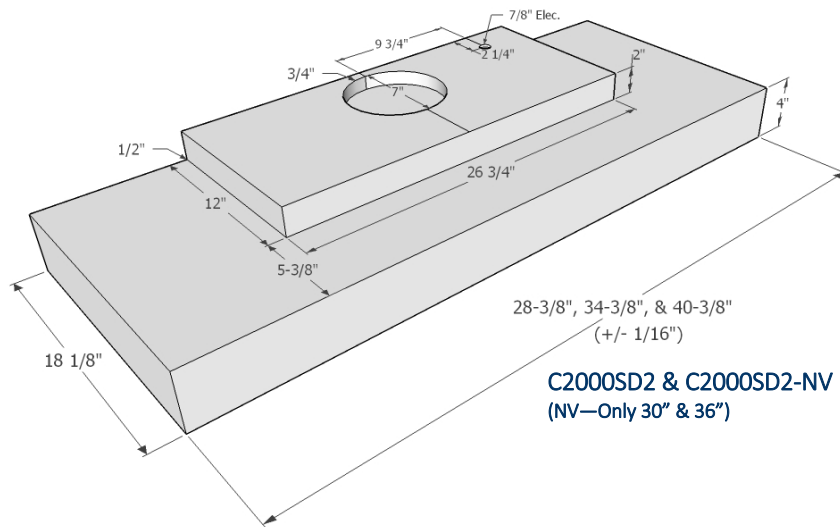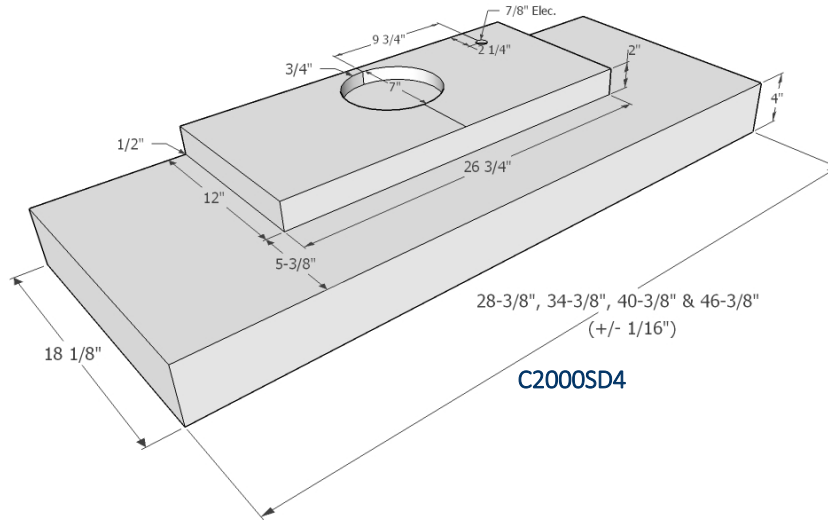

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

32-1/2" Depth, 12" High	MODEL
◆ 675± CFM ◆ 7" Round Duct	ISP1936PSSB-SS ISP1942PSSB-SS ISP1948PSSB-SS ISP36-STK-SS ISP42-STK-SS ISP48-STK-SS
◆ 810± CFM ◆ 8" Round Transition	ISP1936PSSB-8-SS ISP1942PSSB-8-SS ISP1948PSSB-8-SS ISP36-STK-SS ISP42-STK-SS ISP48-STK-SS
◆ 1370± CFM ◆ Two (2) 8" Round Transitions	ISP1948PS1-TWSB-8-SS ISPTW48-STK-SS

Provide height of duct cover needed.
Duct Cover Calculation Page 41



Wood Mounting Frame & Duct Cover—TOP VIEW



Wood Mounting Frame & Duct Cover



ISP1900PSSB

FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Slim Baffle
- ◆ Front Panel Lighting: LED bulbs Included.
- ◆ Heat Controlled Thermostat, Fire Safety Controls. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:


- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: ISP1936PSSB-WH (White)
- ◆ Matte White or Black, additional charge.
Ex: ISP1936PSSB-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddles.

NO Returns on Matte or RAL painted hoods.



Island Pyramid Specifications

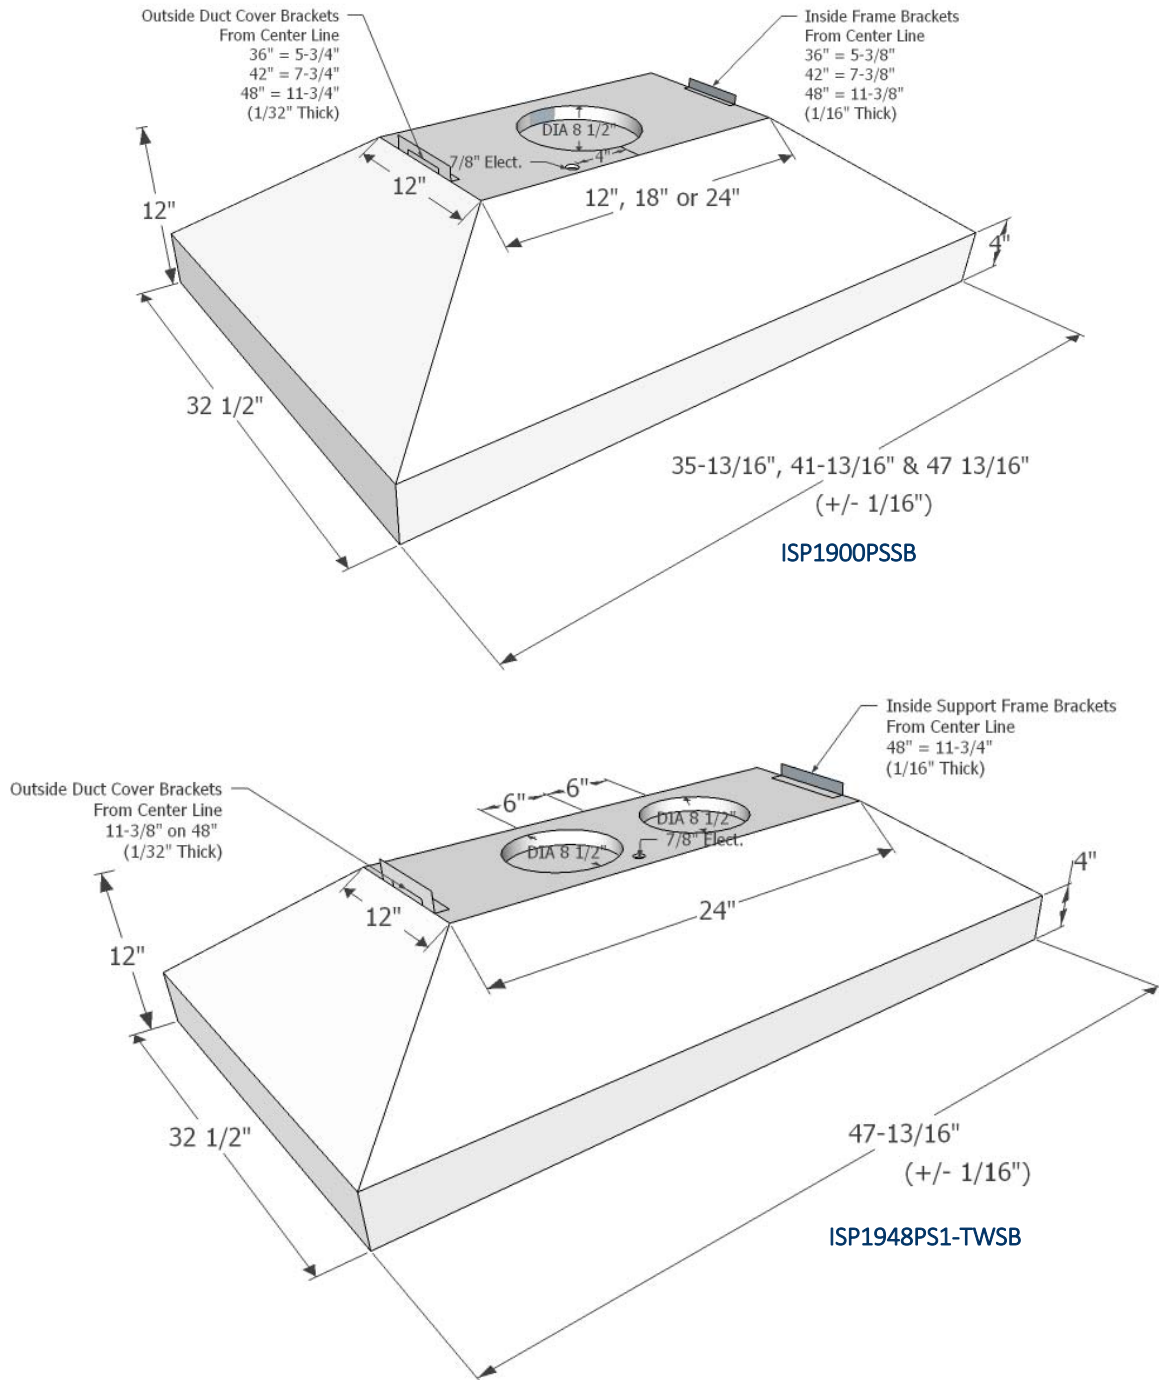

NOTE: Duct Cover Depth & Width

Depth: 11-5/8" All Sizes

Width / Single Duct: 36" = 11-3/4", 42" = 17-3/4", 48" = 23-3/4"

Width / Twin Duct: 48" = 23-3/4"

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

28" Depth, 6" High	MODEL
◆ 675± CFM ◆ 7" Round Duct	IS1930PSSB-SS IS1936PSSB-SS IS1942PSSB-SS IS1948PSSB-SS IS-STK-SS
◆ 810± CFM ◆ 8" Round Transition	IS1930PSSB-8-SS IS1936PSSB-8-SS IS1942PSSB-8-SS IS1948PSSB-8-SS IS-STK-SS
24" Depth, 6" High	MODEL
◆ 390± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct	IS1930SD4SB-SS IS1936SD4SB-SS IS-STK-SS



IS1900PSSB

FEATURES:

- ◆ 304 Marine Grade Stainless Steel
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Slim Baffle
- ◆ Center Panel Lighting: LED bulbs included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 Degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:

- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: IS1930PSSB-8-BL (Black)
- ◆ Matte White or Black, additional charge.
Ex: IS1930PSSB-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers


NO Performance Warranty over BBQ Grills/Griddles.

NO Returns on Matte or RAL painted hoods.

Provide height of duct cover needed.
Duct Cover Calculation Page 41





Wood Mounting Frame & Duct Cover—TOP VIEW

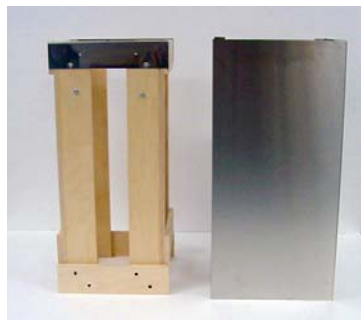

Wood Mounting Frame & Duct Cover

Island Slim Line Specifications

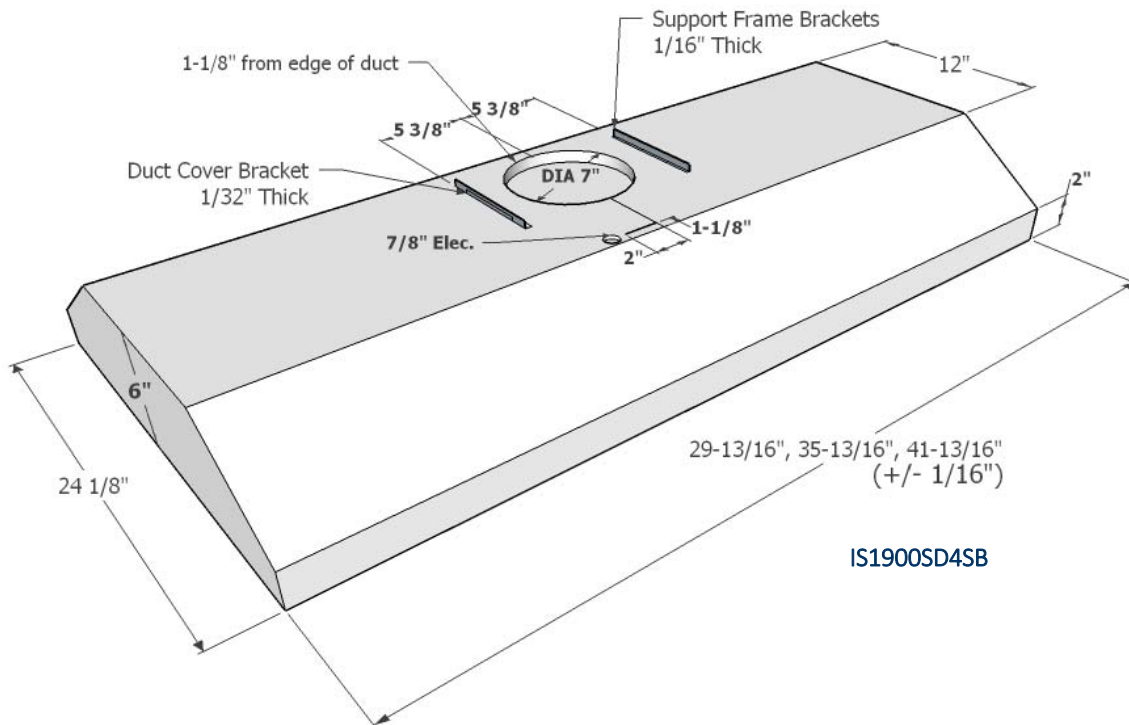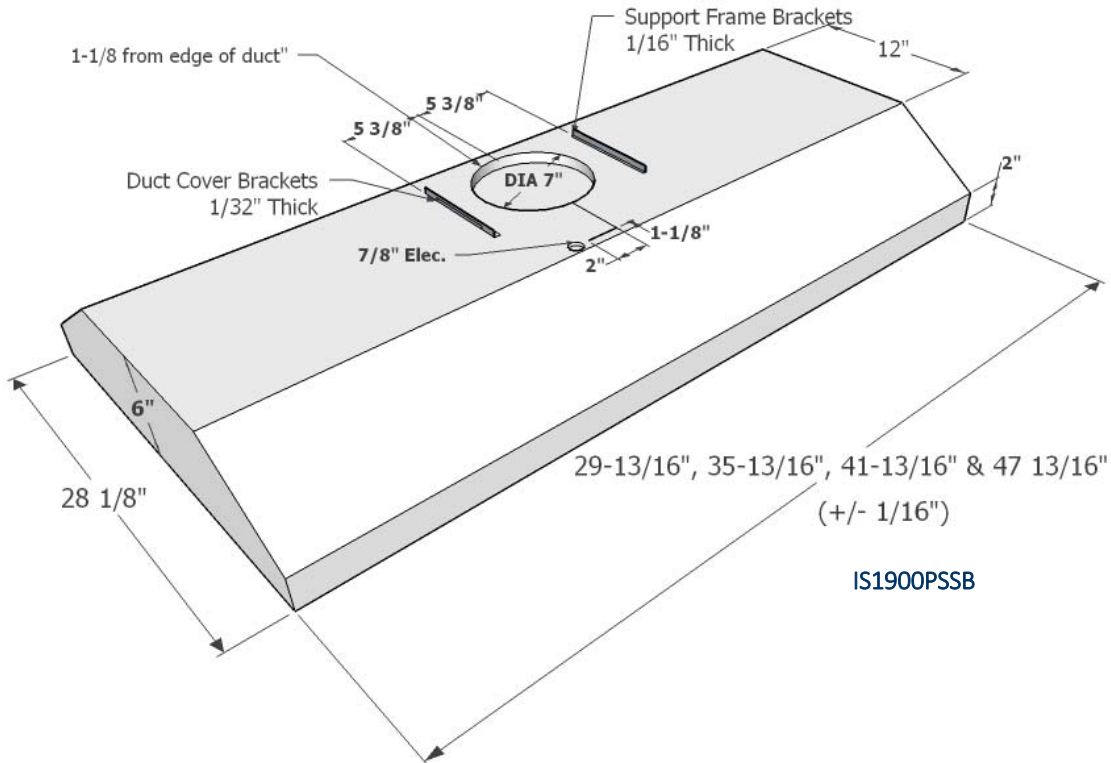

NOTE: Duct Cover Depth & Width
 Single Duct: 11-5/8" D X 11-3/4" W
 Twin Duct: 11-5/8" D X 23-3/4" W

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

28" Depth, 4" High	MODEL
◆ 675± CFM ◆ 7" Round Duct Order duct cover separately from table below at no charge.	ISN2036PSSB-SS ISN2042PSSB-SS ISN2048PSSB-SS ISN-STK-SS
◆ 810± CFM ◆ 8" Round Transition Order duct cover separately from table below at no charge.	ISN2036PSSB-8-SS ISN2042PSSB-8-SS ISN2048PSSB-8-SS ISN-STK-SS
◆ 1370± CFM ◆ Two (2) 8" Round Transitions Order duct cover separately from table below at no charge.	ISN2042PS1-TWSB-8-SS ISN2048PS1-TWSB-8-SS ISNTW-STK-SS

Provide height of duct cover needed.
Duct Cover Calculation Page 41



Wood Mounting Frame &
Duct Cover—TOP VIEW



Wood Mounting Frame & Duct Cover



ISN2000PSSB

FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Slim Baffle
- ◆ Front /Back Panel Lighting: LED bulbs Included.
- ◆ Heat Controlled Thermostat, Fire Safety Controls. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:



- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: ISN2036PSSB-WH (White)
- ◆ Matte White or Black, additional charge.
Ex: ISN2036PSSB-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddles.

NO Returns on Matte or RAL painted hoods.



Island Specifications

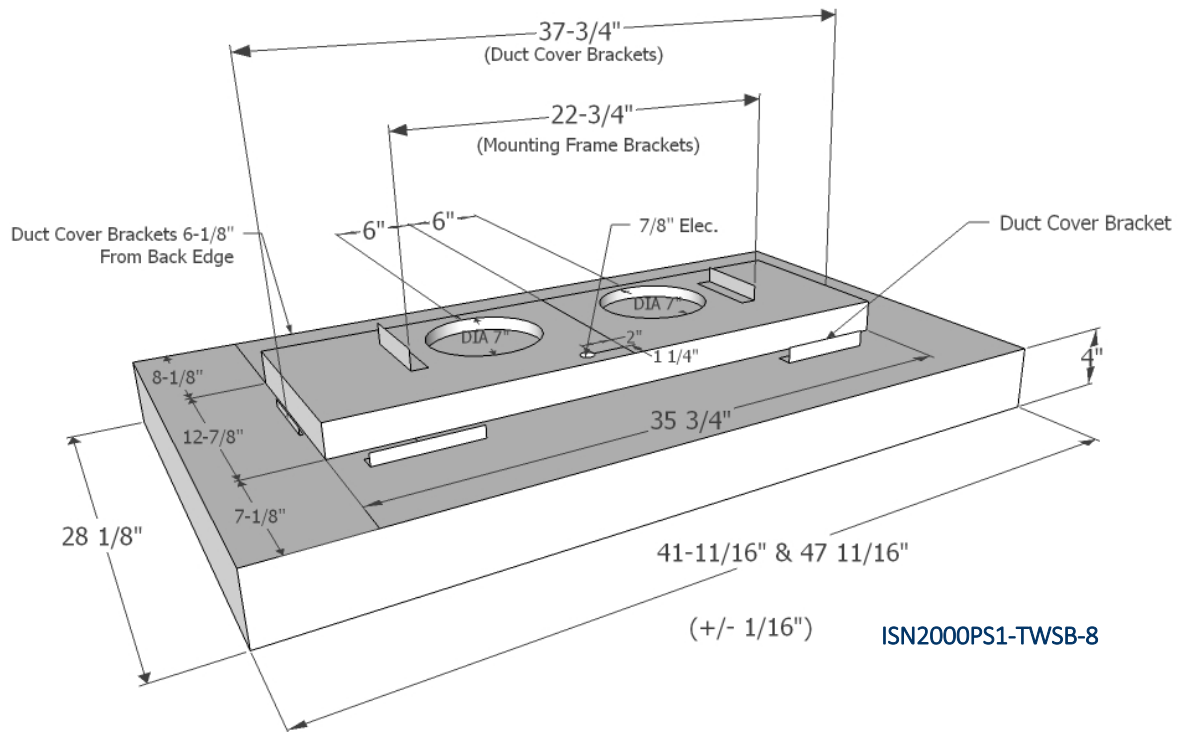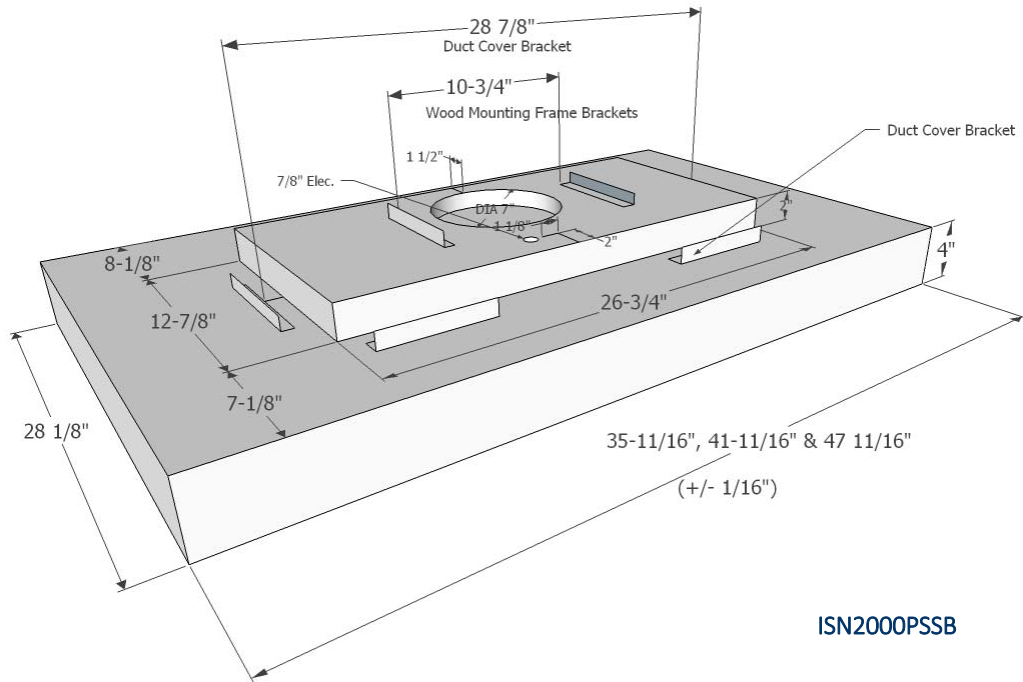

NOTE: Duct Cover Depth & Width

Single Duct: 14-7/8" D X 28-7/8" W

Twin Duct: 14-7/8" D X 37-7/8" W

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

26" Depth, 6" High	MODEL
◆ 750+/- CFM ◆ 8" Round Transition	2042PS-IS-8-SS 2054PS-IS-8-SS 2060PS-IS-8-SS



Handheld Remote

FEATURES:

- ◆ 304 Marine Grade Stainless Steel
- ◆ Hand held remote control; power and lights. On/Off.
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Aluminum Mesh
- ◆ Center Panel Lighting: LED bulbs Included.
- ◆ Available in Matte White for an additional charge.
(NOTE: To clean, use mild soap and warm water)

OPTIONS:



- ◆ Custom Sizes Available.

NO Performance Warranty due to variable distances above cooking surface.

NO Returns on Matte or RAL painted hoods.



Ceiling Mount Island Specifications

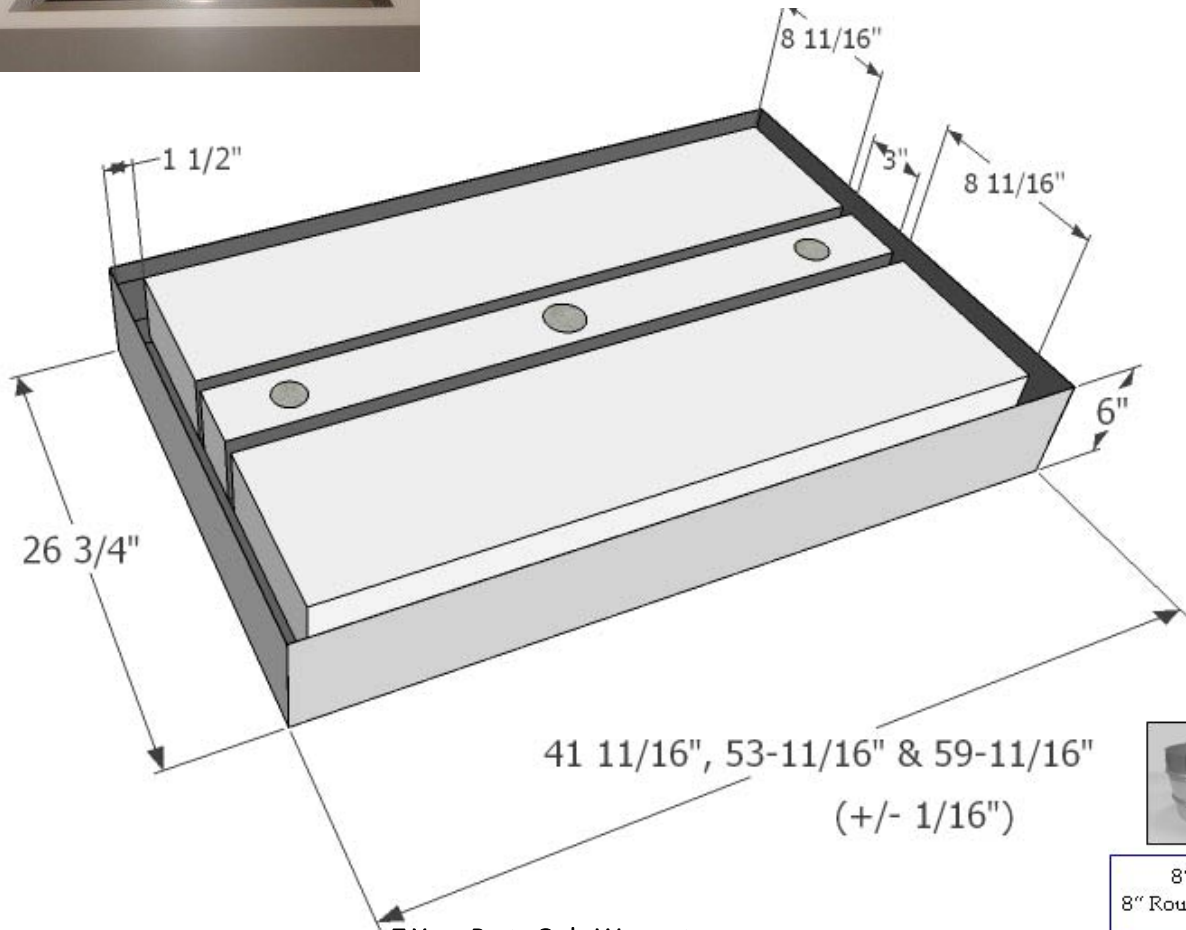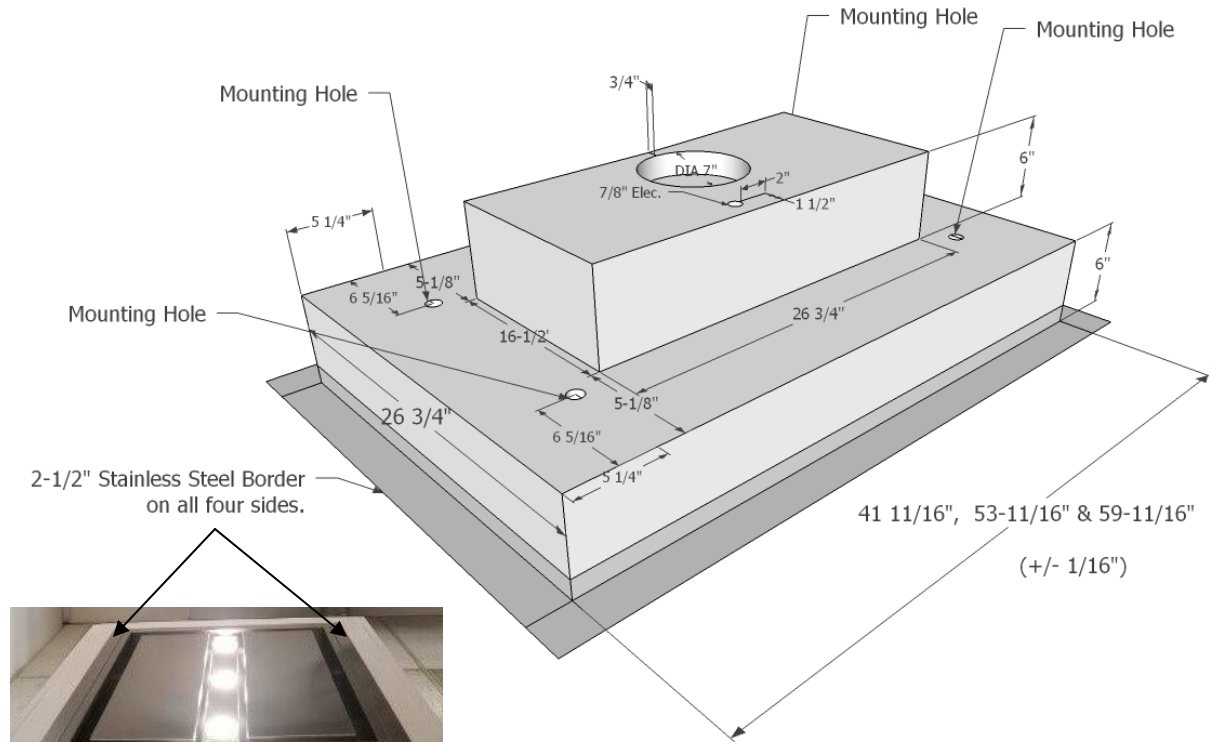

8" Transition
8" Round x 3-1/2" high

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

24" Depth, 18" High	MODEL
◆ 635± CFM ◆ 7" Round Duct	WH1930PSB-SS WH1936PSB-SS WH1942PSB-SS WH1948PSB-SS
◆ 765± CFM ◆ 8" Round Transition	WH1930PSB-8-SS WH1936PSB-8-SS WH1942PSB-8-SS WH1948PSB-8-SS
◆ 850± CFM ◆ 10" Round Transition	WH1930PSB-K-SS WH1936PSB-K-SS WH1942PSB-K-SS WH1948PSB-K-SS
◆ 1295± CFM ◆ Two (2) 8" Round Transitions	WH1936PS1-TWB-8-SS WH1942PS1-TWB-8-SS WH1948PS1-TWB-8-SS
Option: Rear Vented Available. Mesh Filters Only. Ex: WH1900PSR	

WH1900PSB-32-K—Outdoor Series

32" Depth, 18" High	MODEL
◆ 1000 CFM ◆ 10" Round Transition	WH1936PSB-32-K-SS WH1942PSB-32-K-SS WH1948PSB-32-K-SS
◆ 1675 CFM ◆ Two (2) 10" Round Transitions	WH1954PSB-TW32-K-SS WH1960PSB-TW32-K-SS



WH1900PSB



WH1900PSB-32-K

(For specifications - see Page 21)

FEATURES:

- ◆ 304 Marine Grade Stainless Steel
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Front Panel Lighting: LED Bulbs Included.
30" to 48" Hoods take 2 Bulbs (1 Set)
54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Heat Controlled Thermostat, Fire Safety Controlled.
Activates at 130 degrees. (Not Available on Outdoor Series)
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:



- ◆ Duct covers made to your specifications.
Provide Width and Height: Ex: WH-STK-HEIGHT x WIDTH
- ◆ Remote location wiring, see page 40.
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddles.

NO Returns on Matte or RAL painted hoods..





Wall Mount Specifications

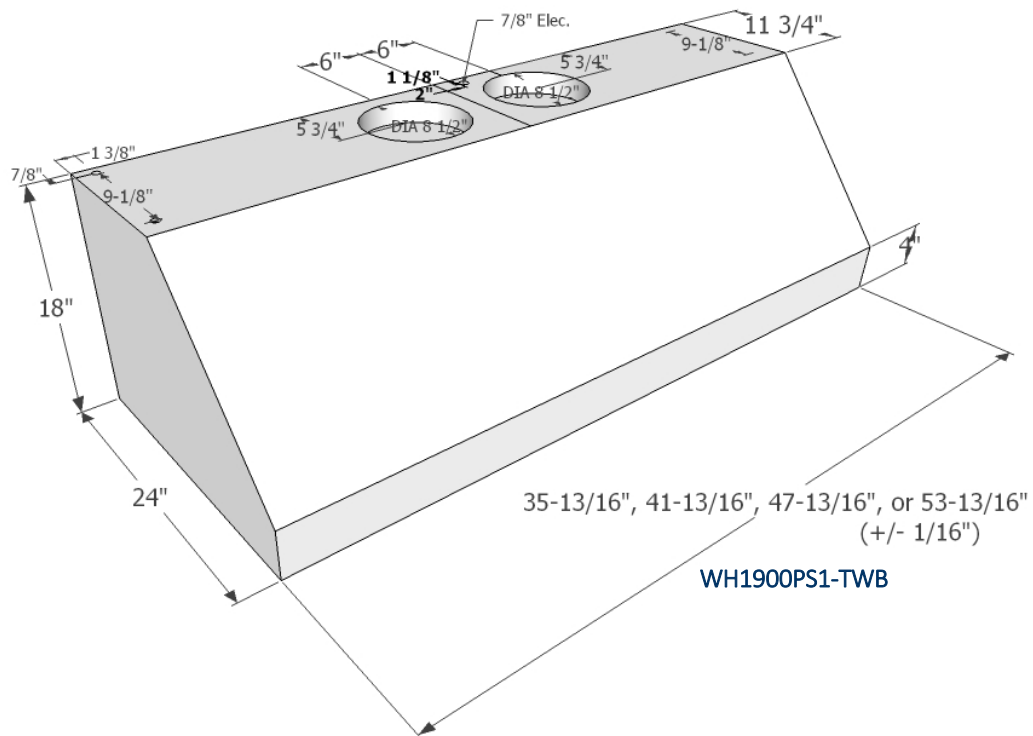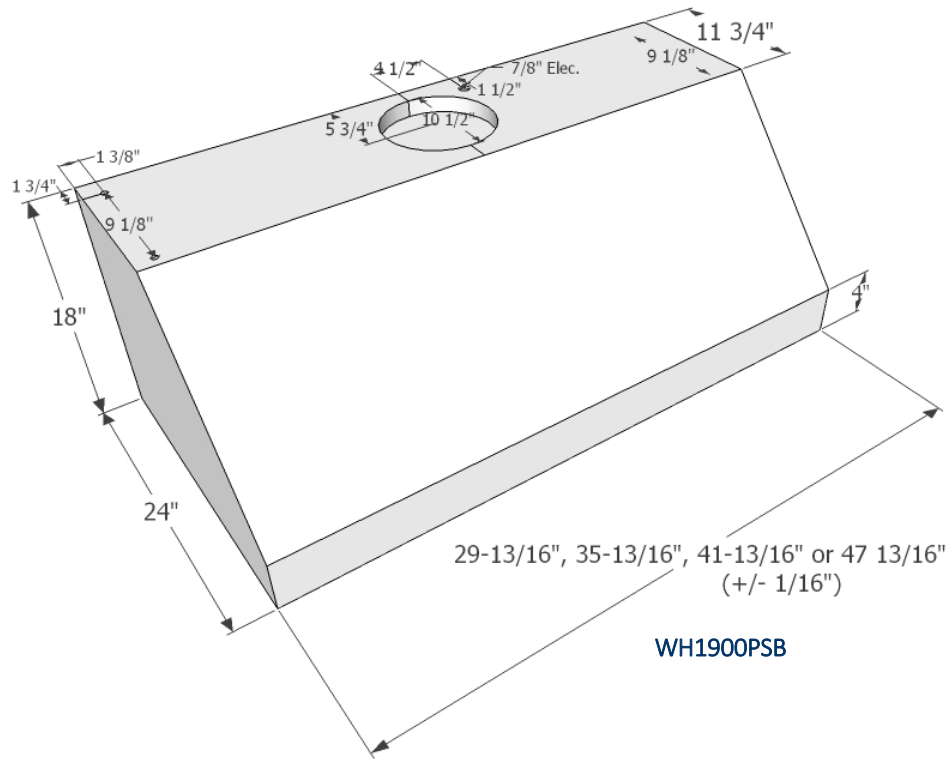

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Outdoor Wall Mount Specifications

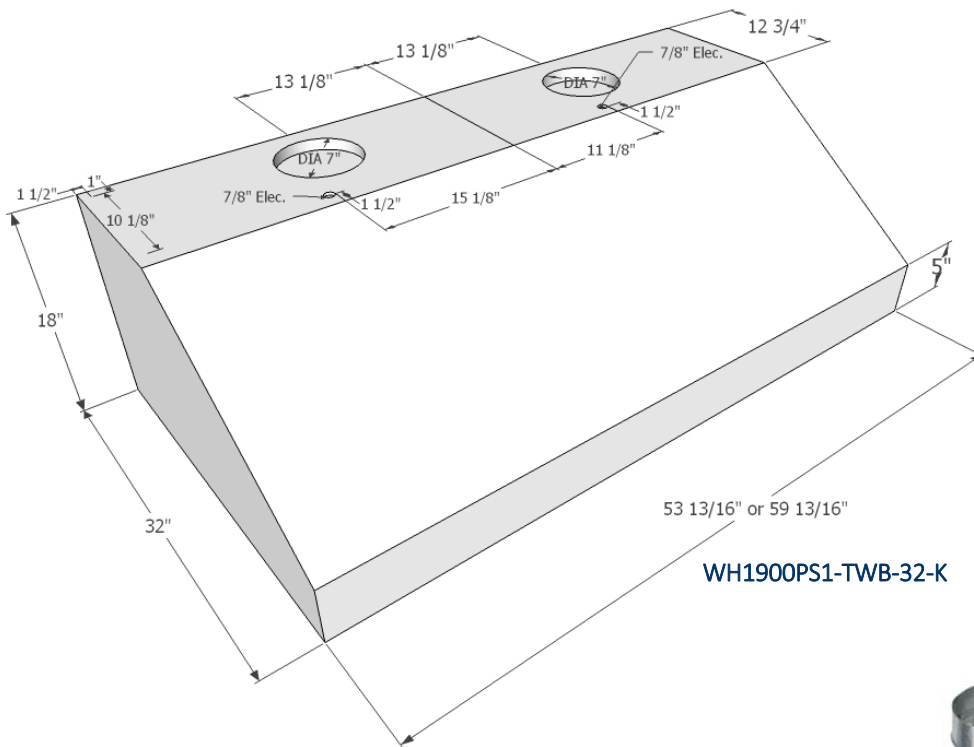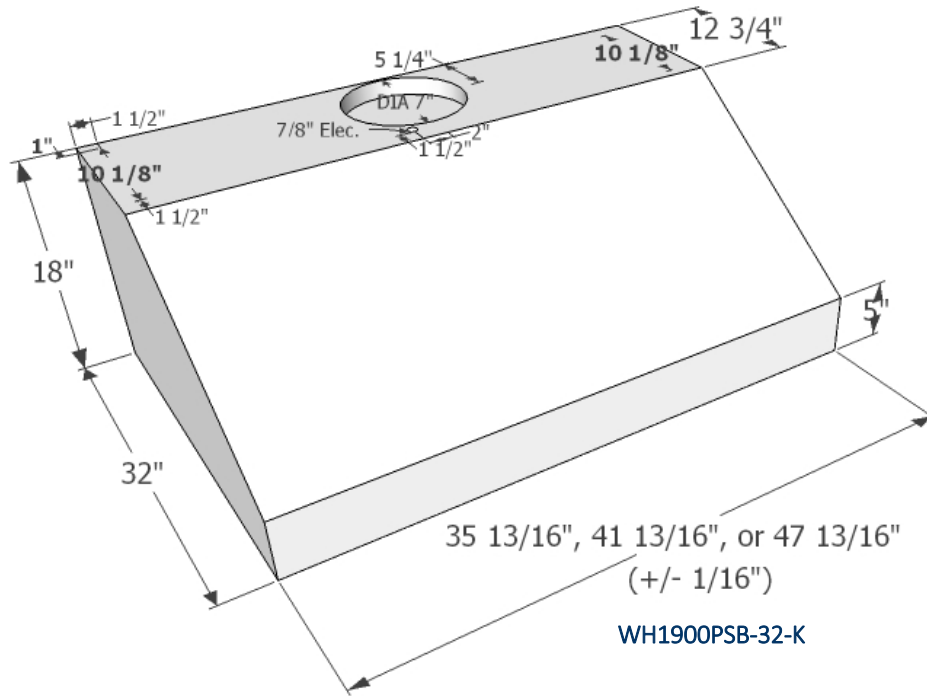

10" Transition
10" Round x 7-1/2" high
(INCLUDED)



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.



20" Depth, 12" High	MODEL
◆ 625± CFM ◆ 7" Round Duct	WHP1930BP1-SS WHP1936BP1-SS WHP30-STK-SS WHP36-STK-SS
◆ 750± CFM ◆ 8" Round Transition	WHP1930BP1-8-SS WHP1936BP1-8-SS WHP30-STK-SS WHP36-STK-SS



Wall Pyramid —WHP1900BP1—Slim Baffle Series

20" Depth, 12" High	MODEL
◆ 570± CFM ◆ 7" Round Duct	WHP1930BP1SB-SS WHP1936BP1SB-SS WHP30-STK-SS WHP36-STK-SS
◆ 675± CFM ◆ 8" Round Transition	WHP1930BP1SB-8-SS WHP1936BP1SB-8-SS WHP30-STK-SS WHP36-STK-SS



Provide height of duct cover needed.
Duct Cover Calculation Page 41

FEATURES:

- ◆ 304 Marine Grade Stainless Steel. Seamless design.
- ◆ Variable Controls.
- ◆ Sones: 1.5 to 4.6.
- ◆ Filters: Aluminum Mesh
- ◆ Filters: Slim Baffle
- ◆ Front Panel Lighting: LED Bulb Included.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.


OPTIONS:

- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: WHP1930BP1SB-BL (Black)
- ◆ Matte White or Black, additional charge.
Ex: WHP1930BP1SB-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty Over BBQ Grill/Griddle.

NO Returns on Matte or RAL painted hoods.

Wall Pyramid Specifications

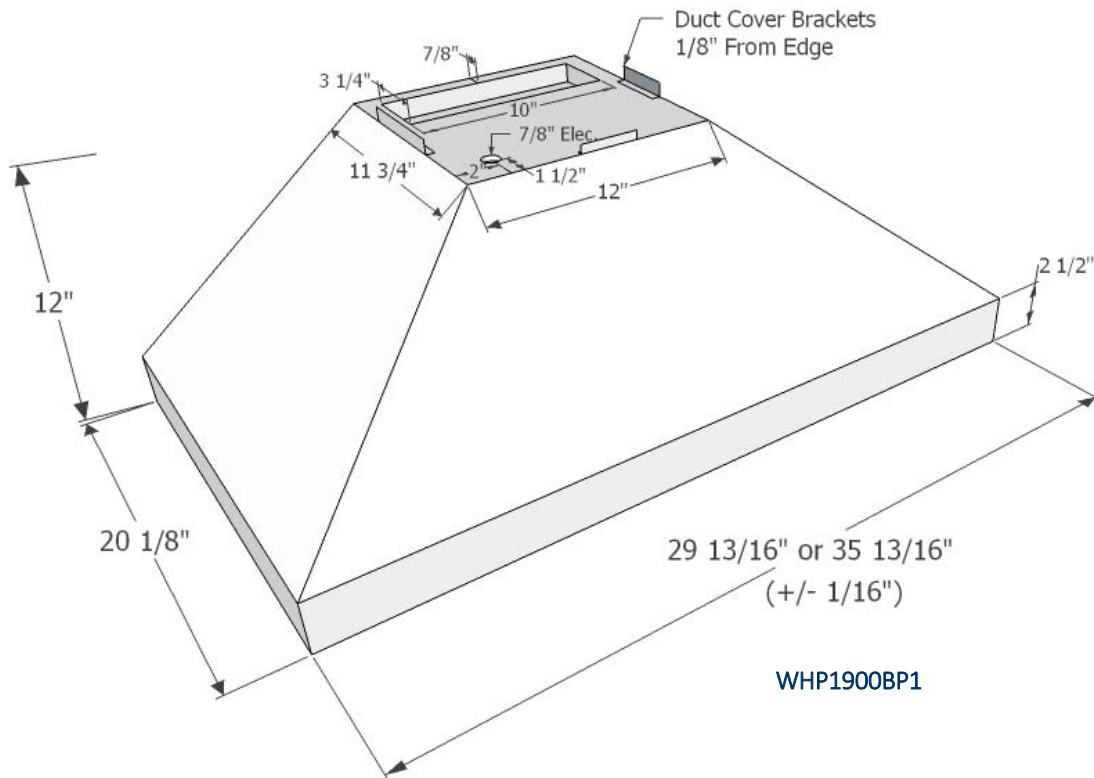

NOTE:
 3" x 10" Rectangle transition to 7" Round.
 Height = 12" (INCLUDED)
 Minimum Duct Cover Height 12".

NOTE: Duct Cover Depth & Width
 11-5/8" D X 11-3/4" W

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!
 All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.


24" Depth, 14" High	MODEL
◆ 675± CFM ◆ 7" Round Duct	WHP1936PSSB-SS WHP36-STK-SS
◆ 810± CFM ◆ 8" Round Transition	WHP1936PSSB-8-SS WHP36-STK-SS
◆ 900± CFM ◆ 10" Round Transition	WHP1936PSSB-K-SS WHP36-STK-SS

24" Depth, 14" High	MODEL
◆ 635± CFM ◆ 7" Round Duct	WHP1942PSB-SS WHP1948PSB-SS WHP42-STK-SS WHP48-STK-S
◆ 765± CFM ◆ 8" Round Transition	WHP1942PSB-8-SS WHP1948PSB-8-SS WHP42-STK-SS WHP48-STK-SS
◆ 850± CFM ◆ 10" Round Transition	WHP1942PSB-K-SS WHP1948PSB-K-SS WHP42-STK-SS WHP48-STK-SS
◆ 1290± CFM ◆ Two (2) 8" Round Transitions	WHP1948PS1-TWB-8-SS WHP1954PS1-TWB-8-SS WHPTW48-STK-SS WHPTW-54-STK-SS

Provide height of duct cover needed.
Duct Cover Calculation Page 41



WHP1936PSSB—Slim Baffles

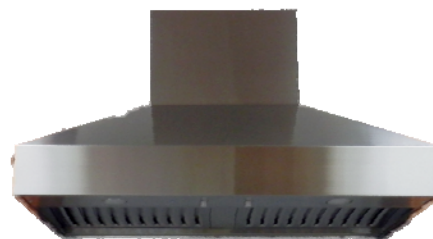

WHP1900PSB—Baffles

FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls.
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffle
- ◆ Filters: 36" - Slim Baffles
- ◆ Front Panel Lighting: LED Bulbs Included.
30" to 48" Hoods take 2 Bulbs (1 Set)
54" Hood takes 4 Bulbs (2 Sets)
- ◆ Heat Controlled Thermostat, Fire Safety Controlled.
Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.



OPTIONS:

- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: WHP1942PSB-8-WH (White)
- ◆ Matte White or Black, additional charge.
Ex: WHP1942PSB-8-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grill/Griddle.
NO Returns on Matte or RAL painted hoods.



Wall Pyramid Specifications

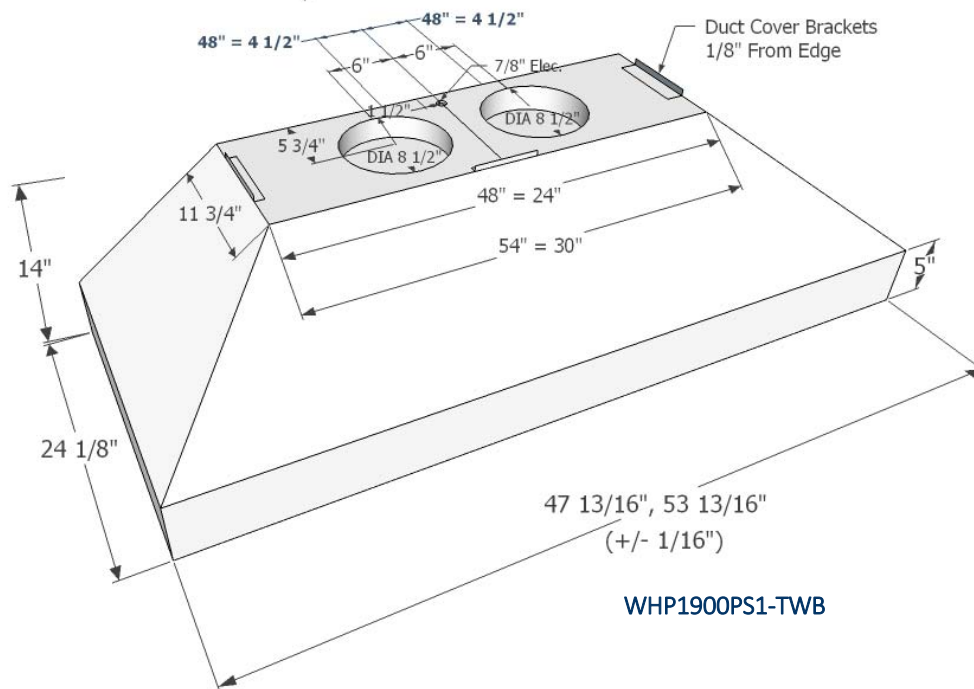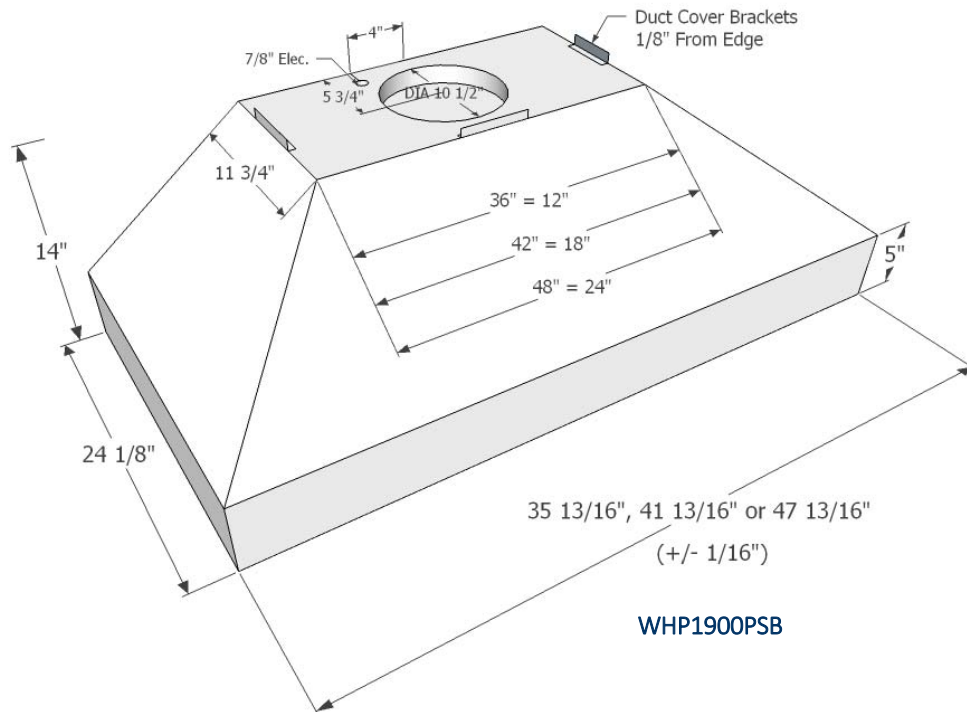

NOTE: Duct Cover Depth & Width

Depth: 11-5/8" All Sizes


Width / Single Duct: 36" = 11-3/4", 42" = 17-3/4", 48" = 23-3/4"

Width / Twin Duct: 48" = 23-3/4", 54" = 29-3/4", 60" = 35-3/4"

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

24" Depth, 4" High	MODEL
◆ 570± CFM ◆ 7" Round Duct	WHN2030BP1SB-SS WHN2036BP1SB-SS WHN-STK-SS
◆ 675± CFM ◆ 7" Round Duct	WHN2036PSSB-SS WHN2042PSSB-SS WHN2048PSSB-SS WHN-STK-SS
◆ 810± CFM ◆ 8" Round Transition	WHN2036PSSB-8-SS WHN2042PSSB-8-SS WHN2048PSSB-8-SS WHN-STK-SS
◆ 1370± CFM ◆ Two (2) 8" Round Transitions	WHN2042PS1-TWSB-8-SS WHN2048PS1-TWSB-8-SS WHNTW-STK-SS

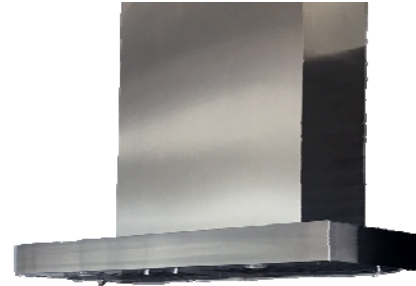

WHN2000BP1SB

FEATURES:

- ◆ 304 Marine Grade Stainless Steel
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Slim Baffles
- ◆ Front Panel Lighting: LED Bulbs Included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:


- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote location wiring, see page 40.
- ◆ Black or White Powder Coat, additional charge.
Ex: WHN2030PSSB-BL (Black)
- ◆ Matte White or Black, additional charge.
Ex: WHN2030PSSB-MB (Matte Black)
(NOTE: To clean, use mild soap and warm water)
- ◆ Custom Sizes Available.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grill/Griddle

NO Returns on Matte or RAL painted hoods.

Provide height of duct cover needed.
Duct Cover Calculation Page 41


Contemporary Slim Wall Specifications

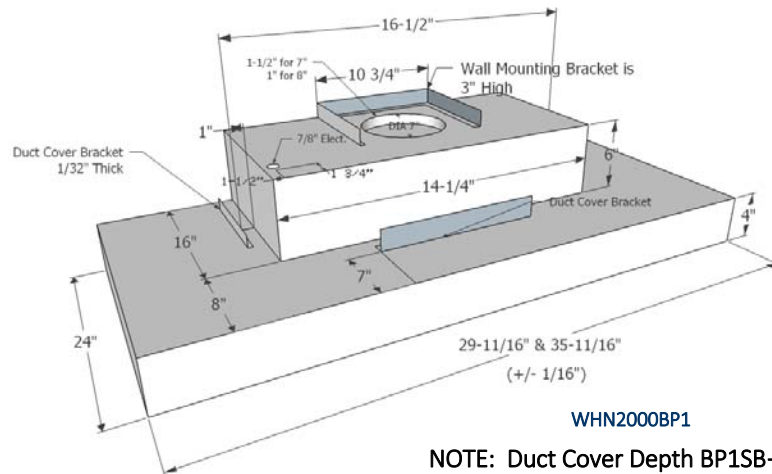


Min. Duct Cover Height on 7' ceiling is 9-1/2" with mounting height of 35" above cooking surface.

WHN2000BP1

NOTE: Duct Cover Depth BP1SB—17".

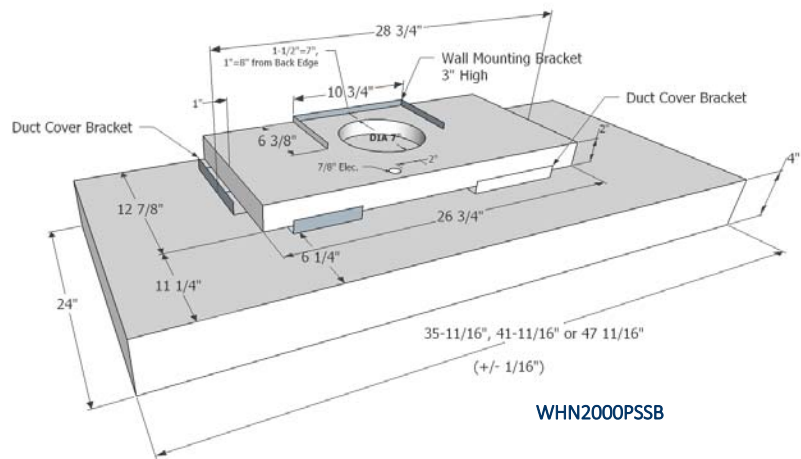

WHN2000PSSB

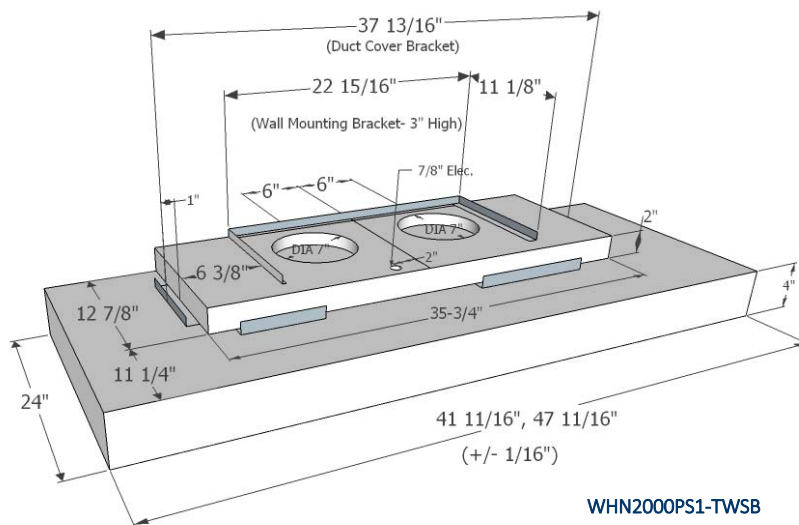

WHN2000PS1-TWSB

NOTE: Duct Cover Depth 13-7/8" - Minimum Duct Cover Height: 5".

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (±) 1/16" and are subject to change. Drawings are not to scale.

22" Depth, 10" High Mesh Filters	MODEL
750± CFM 7" Round Duct	1930PS-10-SS 1936PS-10-SS 1942PS-10-SS 1948PS-10-SS
900± CFM 8" Round Transition	1930PS-10-8-SS 1936PS-10-8-SS 1942PS-10-8-SS 1948PS-10-8-SS



1900PS-10



1900PSB-10

Select 10—Baffle Filters

22" Depth, 10" High	MODEL
635± CFM 7" Round Duct	1930PSB-10-SS 1936PSB-10-SS 1942PSB-10-SS 1948PSB-10-SS
765± CFM 8" Round Transition	1930PSB-10-8-SS 1936PSB-10-8-SS 1942PSB-10-8-SS 1948PSB-10-8-SS
435± CFM 7" Round Duct Slim Baffle Available	1930SD4-10-SS 1936SD4-10-SS 1942SD4-10-SS

FEATURES:

- 304 Marine Grade Stainless Steel.
- Variable Controls.
- Sones: 1.5 to 4.6
- Filters: Aluminum Mesh or Stainless Steel Baffles
- Lighting Mesh Filters: Center Panel LED Bulbs Included.
- Lighting Baffle Filters: Front Panel LED Bulbs Included.
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- Suggested Distance Code: 36" above cooking surface.

OPTIONS:

- Duct covers made to your specifications
Provide Width and Height
Brackets will be installed to allow unit to be wall mounted.
- Slim Baffle Filters available on SD4
- Black or White Powder Coat, additional charge.
Ex: 1930PS-10-WH (White)
- Matte White or Black, additional charge.
Ex: 1930PS-10-MB (Matte Black)
- (NOTE: To clean, use mild soap and warm water)
- Remote location wiring, see page 40.
- Models can be ordered without blowers for use with inline or external blowers

NO Performance Warranty over BBQ Grills/Griddle.



NO Returns on Matte or RAL painted hoods.

NOTE: Mounting Brackets for Wall Mount Application.

MUST indicate "wall mount" at the time of order.



Select 10 Specifications

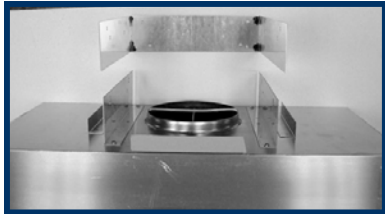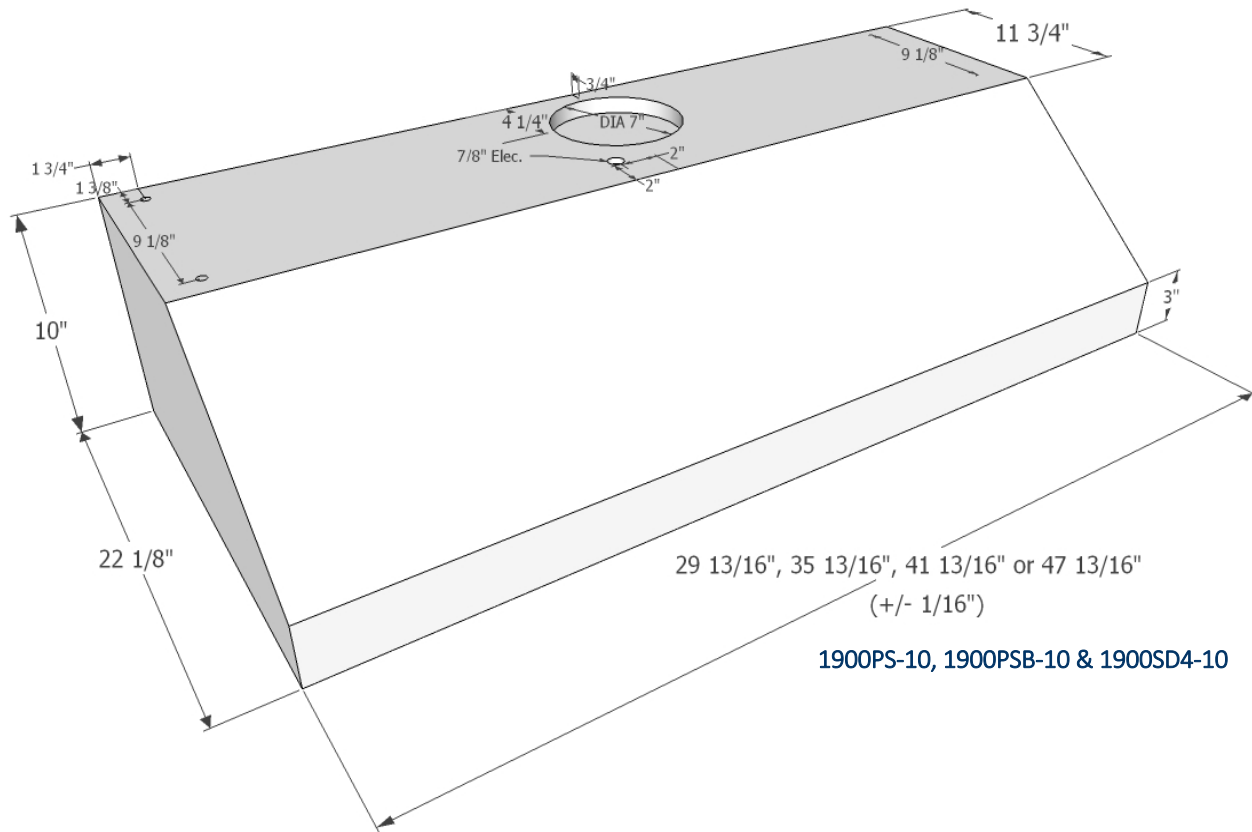

NOTE: Mounting Brackets for Wall Mount Application.

MUST indicate "wall mount" at the time of order.

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are ($\pm$) $1/16"$ and are subject to change. Drawings are not to scale.

18" Depth, 6" High	MODEL Stainless	MODEL (Choose Color)
◆ 360± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	N1930SD2-SS N1936SD2-SS N1942SD2-SS N1948SD2-SS	N1930SD2-BL or WH N1936SD2-BL or WH N1942SD2-BL or WH N1948SD2-BL or WH
◆ 435± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	N1930SD4-SS N1936SD4-SS N1942SD4-SS	N1930SD4-BL or WH N1936SD4-BL or WH N1942SD4-BL or WH
◆ 635± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930BP1-SS N1936BP1-SS N1942BP1-SS	N1930BP1-BL or WH N1936BP1-BL or WH N1942BP1-BL or WH
◆ 735± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930BP-SS N1936BP-SS N1942BP-SS N1948BP-SS	N1930BP-BL or WH N1936BP-BL or WH N1942BP-BL or WH N1948BP-BL or WH
◆ 900± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition	N1930BP-8-SS N1936BP-8-SS N1942BP-8-SS N1948BP-8-SS	N1930BP-8-BL or WH N1936BP-8-BL or WH N1942BP-8-BL or WH N1948BP-8-BL or WH
22" Depth, 6" High	MODEL Stainless	MODEL (Choose Color)
◆ 750± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930PS-SS N1936PS-SS N1942PS-SS N1948PS-SS	N1930PS-BL or WH N1936PS-BL or WH N1942PS-BL or WH N1948PS-BL or WH
◆ 900± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition	N1930PS-8-SS N1936PS-8-SS N1942PS-8-SS N1948PS-8-SS	N1930PS-8-BL or WH N1936PS-8-BL or WH N1942PS-8-BL or WH N1948PS-8-BL or WH



N1900BP-SS



N1900SD2-BL



N1900SD4-WH

FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable or Rocker Controls.
- ◆ Filters: Aluminum Mesh
- ◆ Center Panel Lighting: LED bulbs included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees. (Not available on T or SD2).
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface. SD2 can be mounted at 30" above cooking surface.

OPTIONS:

- ◆ Matte White or Black, additional charge.
Ex: N1930BP1-MB (Matte Black) (NOTE: To clean, use mild soap and warm water)
- ◆ Remote location wiring, see page 40.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Returns on Matte or RAL painted hoods.

[Specification Page: 31-32](#)



18" Depth, 6" High	MODEL Stainless	MODEL (Choose Color)
◆ 325± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	N1930SD2SB-SS N1936SD2SB-SS N1942SD2SB-SS N1948SD2SB-SS	N1930SD2SB-BL or WH N1936SD2SB-BL or WH N1942SD2SB-BL or WH N1948SD2SB-BL or WH
◆ 390± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	N1930SD4SB-SS N1936SD4SB-SS N1942SD4SB-SS	N1930SD4SB-BL or WH N1936SD4SB-BL or WH N1942SD4SB-BL or WH
◆ 570± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930BP1SB-SS N1936BP1SB-SS N1942BP1SB-SS	N1930BP1SB-BL or WH N1936BP1SB-BL or WH N1942BP1SB-BL or WH
◆ 660± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930BPSB-SS N1936BPSB-SS N1942BPSB-SS N1948BPSB-SS	N1930BPSB-BL or WH N1936BPSB-BL or WH N1942BPSB-BL or WH N1948BPSB-BL or WH
◆ 790± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition	N1930BPSB-8-SS N1936BPSB-8-SS N1942BPSB-8-SS N1948BPSB-8-SS	N1930BPSB-8-BL or WH N1936BPSB-8-BL or WH N1942BPSB-8-BL or WH N1948BPSB-8-BL or WH
22" Depth, 6" High	MODEL Stainless	MODEL (Choose Color)
◆ 675± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct	N1930PSSB-SS N1936PSSB-SS N1942PSSB-SS N1948PSSB-SS	N1930PSSB-BL or WH N1936PSSB-BL or WH N1942PSSB-BL or WH N1948PSSB-BL or WH
◆ 810± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition	N1930PSSB-8-SS N1936PSSB-8-SS N1942PSSB-8-SS N1948PSSB-8-SS	N1930PSSB-8-BL or WH N1936PSSB-8-BL or WH N1942PSSB-8-BL or WH N1948PSSB-8-BL or WH



N1900BPSB

FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable or Rocker Controls.
- ◆ Filters: Slim Baffle
- ◆ Center Panel Lighting: LED bulbs included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees. (Not available on T or SD2).
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface. SD2 can be mounted at 30" above cooking surface.

OPTIONS:




- ◆ Matte Black, additional charge.
Ex: N1930BP1SB-MB (Matte Black) (NOTE: To clean, use mild soap and warm water)
- ◆ Remote location wiring, see page 40.
- ◆ Models can be ordered without blowers for use with inline or external blowers

NO Returns on Matte or RAL painted hoods.

[Specification Page: 31-32](#)





Under Cabinet Slim Line Specifications

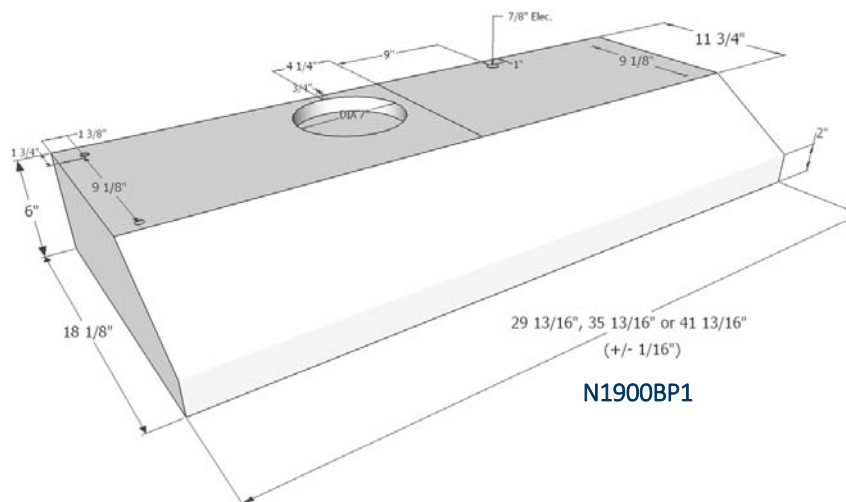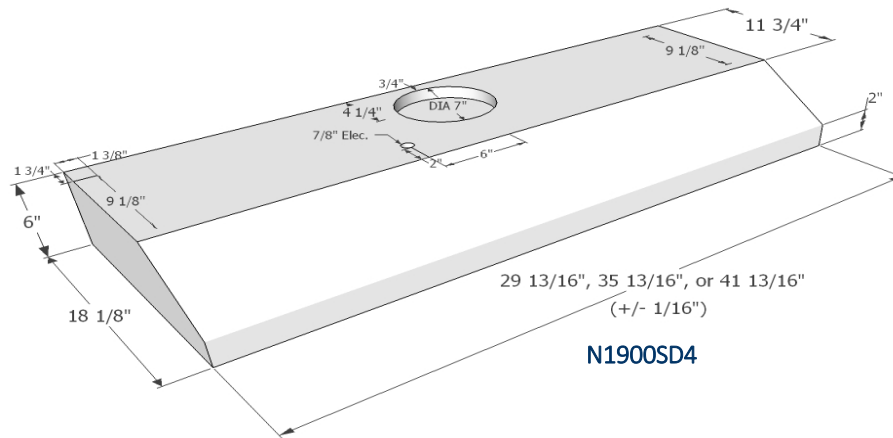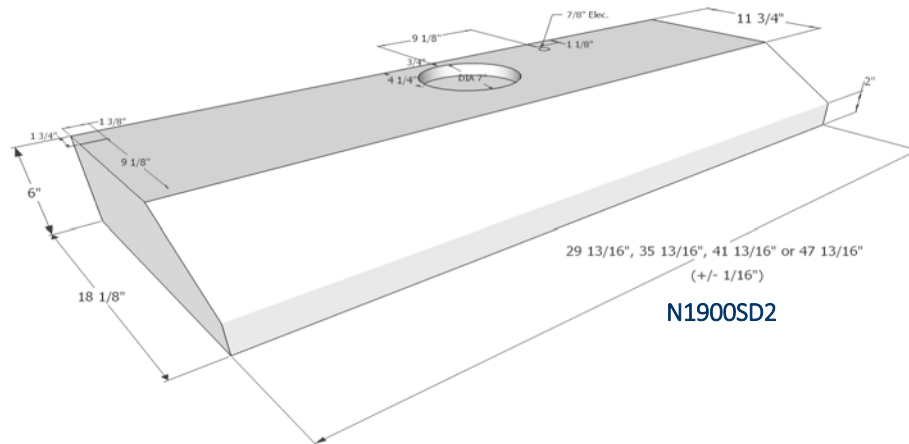

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

Under Cabinet Slim Line Specifications

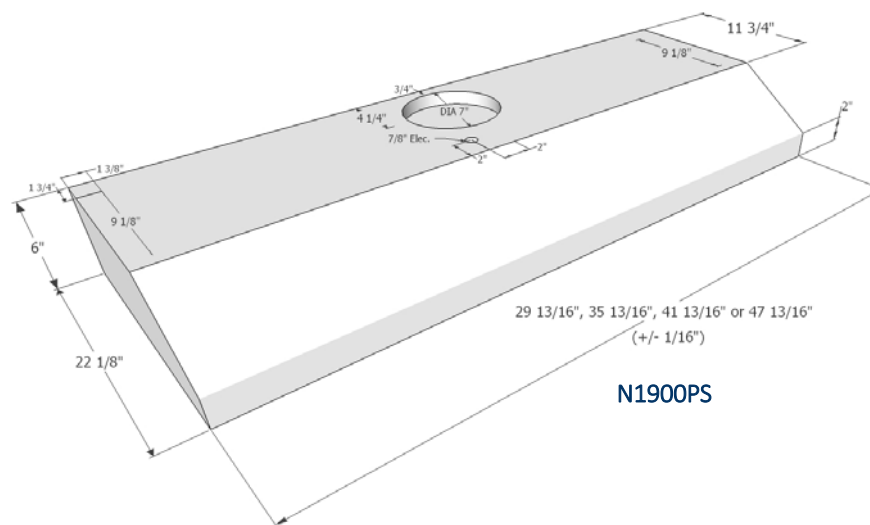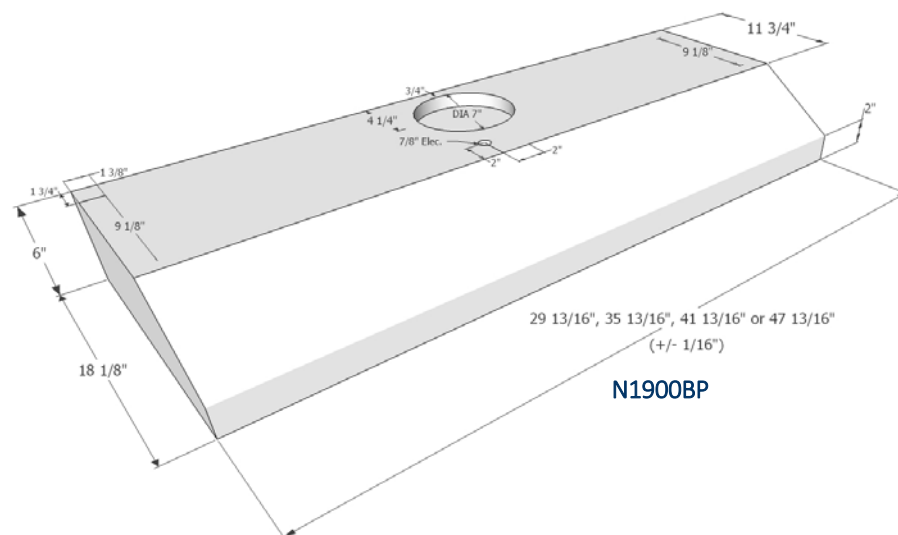

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.

11" High, Drawer Extends to 22" Depth	MODEL White or Black Front Panel	MODEL Stainless Front Panel
◆ 750± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct, 4.25" Off Center	WHITE PANEL G3030PS1-WH G3036PS1-WH G3042PS1-WH BLACK PANEL G3030PS1-BL G3036PS1-BL G3042PS1-BL	WHITE BODY / STAINLESS PANEL G3030PS1-WH-SS G3036PS1-WH-SS G3042PS1-WH-SS BLACK BODY / STAINLESS PANEL G3030PS1-BL-SS G3036PS1-BL-SS G3042PS1-BL-SS
◆ 900± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition 4.25" Off Center	WHITE PANEL G3030PS1-8-WH G3036PS1-8-WH G3042PS1-8-WH BLACK PANEL G3030PS1-8-BL G3036PS1-8-BL G3042PS1-8-BL	WHITE BODY / STAINLESS PANEL G3030PS1-8-WH-SS G3036PS1-8-WH-SS G3042PS1-8-WH-SS BLACK BODY / STAINLESS PANEL G3030PS1-8-BL-SS G3036PS1-8-BL-SS G3042PS1-8-BL-SS
6" High, Drawer Extends to 18" Depth	MODEL White or Black Front Panel	MODEL Stainless Front Panel
◆ 435± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct	WHITE PANEL G3030SD4-WH G3036SD4-WH G3042SD4-WH G3048SD4-WH BLACK PANEL G3030SD4-BL G3036SD4-BL G3042SD4-BL G3048SD4-BL	WHITE BODY / STAINLESS PANEL G3030SD4-WH-SS G3036SD4-WH-SS G3042SD4-WH-SS G3048SD4-WH-SS BLACK BODY / STAINLESS PANEL G3030SD4-BL-SS G3036SD4-BL-SS G3042SD4-BL-SS G3042SD8-BL-SS
◆ 360± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct	WHITE PANEL G3030SD2-WH G3036SD2-WH G3042SD2-WH BLACK PANEL G3030SD2-BL G3036SD2-BL G3042SD2-BL	WHITE BODY / STAINLESS PANEL G3030SD2-WH-SS G3036SD2-WH-SS G3042SD2-WH-SS BLACK BODY / STAINLESS PANEL G3030SD2-BL-SS G3036SD2-BL-SS G3042SD2-BL-SS

FEATURES:



G3000SD4-WH-SS

- ◆ Variable or Rocker Controls.
- ◆ Lighting: 75 Watt Max Incandescent. (Not Included)
- ◆ Filters: Aluminum Mesh
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees. (On PS1 model only).
- ◆ Suggested Distance Code: 36" above cooking surface. SD2 can be mounted at 30".
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Installation: Included Mounting Screws.



11" High, Drawer Extends to 22" Depth	MODEL
◆ 750± CFM @ 1.5 to 4.6 Sones ◆ 7" Round Duct, 4.25" Off Center ◆ Hood Body: WH=White, BL=Black ◆ Wood Front Ready. Wood Front Provided by Home Owner.	WHITE 3030PS1-WH 3036PS1-WH 3042PS1-WH BLACK 3030PS1-BL 3036PS1-BL 3042PS1-BL
◆ 900± CFM @ 1.5 to 4.6 Sones ◆ 8" Round Transition, 4.25" Off Center ◆ Hood Body: WH=White, BL=Black ◆ Wood Front Ready. Wood Front Provided by Home Owner.	WHITE 3030PS1-8-WH 3036PS1-8-WH 3042PS1-8-WH BLACK 3030PS1-8-BL 3036PS1-8-BL 3042PS1-8-BL
6" High, Drawer Extends to 18" Depth	MODEL
◆ 435± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct ◆ Hood Body: WH=White, BL=Black ◆ Wood Front Ready. Wood Front Provided by Home Owner.	WHITE 3030SD4-WH 3036SD4-WH 3042SD4-WH 3048SD4-WH BLACK 3030SD4-BL 3036SD4-BL 3042SD4-BL 3048SD4-BL
◆ 360± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct ◆ Hood Body: WH=White, BL=Black ◆ Wood Front Ready. Wood Front Provided by Home Owner.	WHITE 3030SD2-WH 3036SD2-WH 3042SD2-WH BLACK 3030SD2-BL 3036SD2-BL 3042SD2-BL





3000SD4-BL

FEATURES:

- ◆ Variable or Rocker Controls.
- ◆ Lighting: 75 Watt Max Incandescent. (Not Included)
- ◆ Filters: Aluminum Mesh
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees. (On PS1 model only).
- ◆ Suggested Distance Code: 36" above cooking surface. SD2 can be mounted at 30".
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Installation: Included Mounting Screws.

Flush Mount Specifications

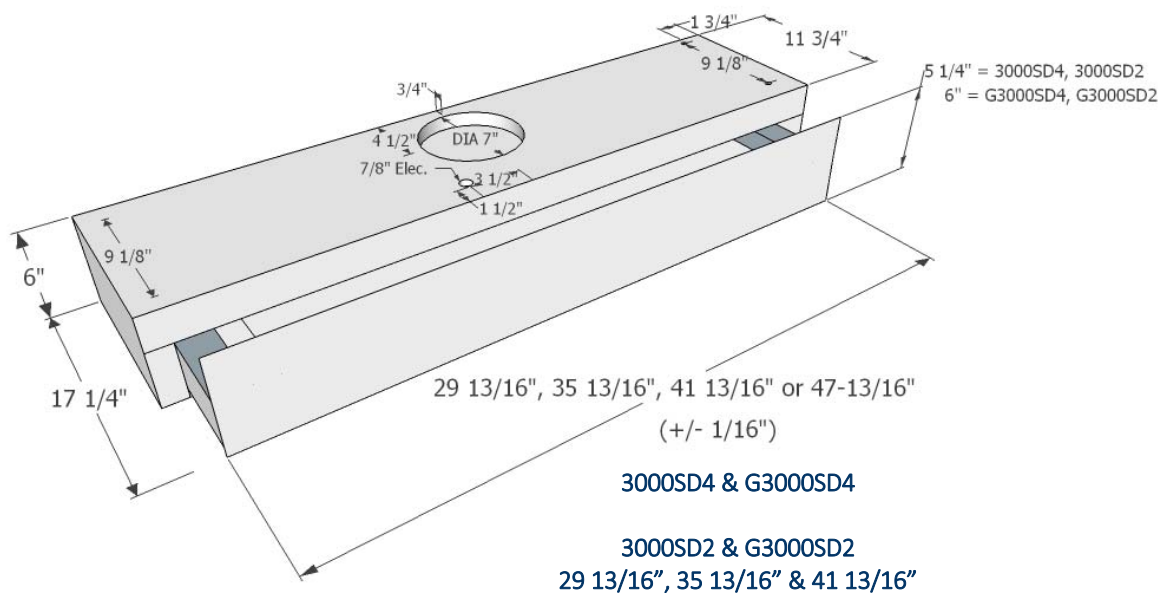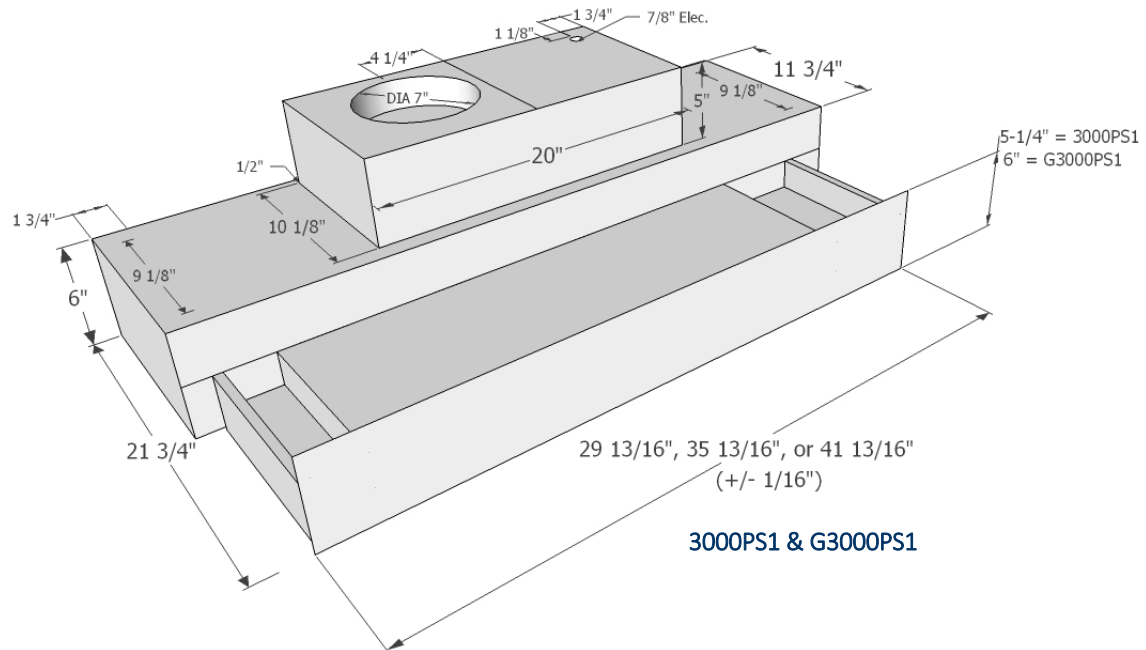

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.



Recycling Cabinet

Recycling Cabinet: 12", 15" or 18" Width	MODEL
◆ Front Panel: Stainless, Black or White ◆ Wood Front Ready (WF), to match existing cabinets. Wood Panel Supplied by Home Owner.	RC12-BL-SS
	RC12-WH-SS
	RC12-BL-WF
	RC12-WH-WF
	RC12-WH
	RC12-BL
	RC15-BL-SS
	RC15-WH-SS
	RC15-BL-WF
	RC15-WH-WF
	RC15-WH
	RC15-BL
	RC18-BL-SS
	RC18-WH-SS
	RC18-BL-WF
	RC18-WH-WF
	RC18-WH
	RC18-BL



RC15-WH-SS

FEATURES:

- ◆ Trash Cans Included
 - *RC-12 Includes one 10 Gallon Can
 - RC15 Includes Two 7 Gallon Cans
 - RC18 Includes Two 10 Gallon Cans

*RC12 includes hooks on inside front panel to hang trash bags.

OPTIONS:

- ◆ Black Base with Stainless Steel Front Panel
Ex: RC15-BL-SS
- ◆ Custom Sizes Available.

Warranty: 1 year parts only

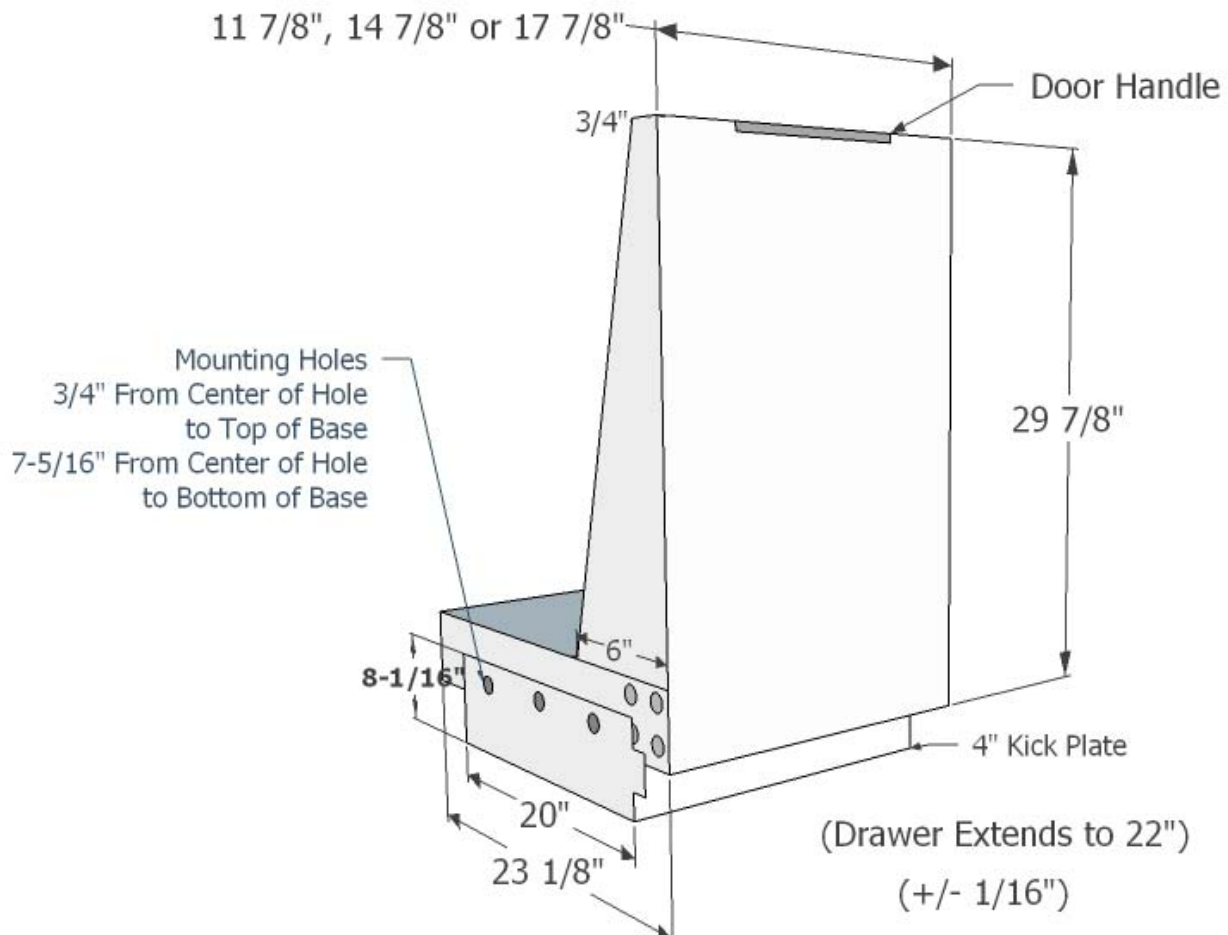


Photo shown is RC12-WH-SS
(Photo is for visual purposes only)



Recycle for a better tomorrow.



Recycling Cabinet Specifications



(Total Height $33\text{-}\frac{7}{8}"$)
Wood Front Ready does
not have a handle as
shown above.



Recycle for a better tomorrow.

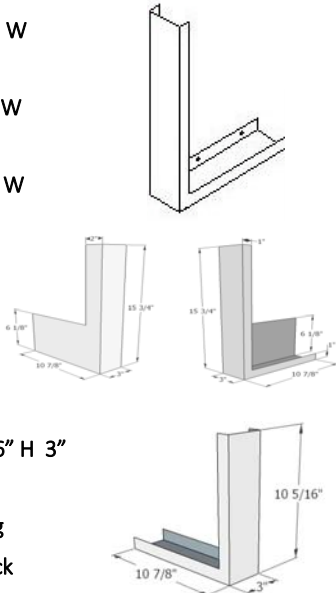
MODEL SERIES	FEATURES	MODEL
Microwave Filler Kits—(Set of 2)  All Metal for Fire Safety!	◆ All Metal – 20 Gauge Steel ◆ MF3 = 11" D X 15-3/4" H X 3" W ◆ MF6 = 11" D X 15-3/4" H X 6" W ◆ FK3 = 11" D X 17-1/4" H X 3" W ◆ GMF3 = 11" D X 15-3/4" H with 6" high side filler. ◆ WMF3 = 10-7/8" D X 10-5/16" H 3" ◆ Custom Sizes – Call For Pricing ◆ Standard Colors: White & Black 	MF3-SS MF3-WH MF3-BL MF6-SS MF6-WH MF6-BL FK3-SS FK3-WH FK3-BL GMF3-SS GMF3-WH GMF3-BL WMF3-SS WMF3-WH WMF3-BL
RE-CIRCULATING KIT 	When Venting to Outside is Not Possible ◆ Replaceable Charcoal Combo Filter ◆ Mounting Hardware Included ◆ Allow 2 3/8" Height for Kit Installation ◆ Standard Finishes: Black & White ◆ Available in Stainless Steel for an additional charge.	30NV-SS 30NV-WH 30NV-BL 36NV-SS 36NV-WH 36NV-BL 42NV-SS 42NV-WH 42NV-BL 48NV-SS 48NV-WH 48NV-BL
Flange (C2000) 	◆ Standard 3/4" Flange used with the C2000 Series. ◆ Custom sizes available for a perfect fit. Call for quote.	7500 FLANGE
Powder Coating 	◆ Standard black or white powder coating. ◆ Matte black or Matte White. ◆ RAL Colors available. Provide RAL Color Code. ◆ Additional charges for powder coating. Powder Coating Not Available On Ventilators	RAL = Color Code 30" to 48" = \$350 54" to 60" = \$450

Factory Wired for Remote Location Controls

Why not put your controls where they can be easily reached. Perfect for ADA applications. A perfect match for pro-style or everyday cooking!




Imperial includes Light & Motor Switches and Knobs.
(BP, PS, SD4 Variable Switches)

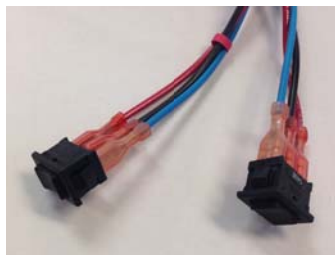

Imperial includes Light & Motor Switches.
(SD2 Rocker Switches)



Assembled Control Unit Complete

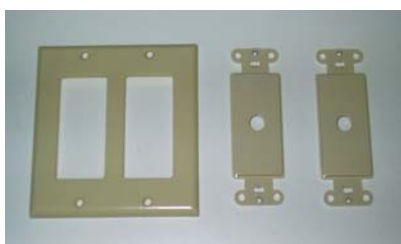

Control Mounting & Trim Plate **(NOT Included)**



Dual Gang Receptacle Box **(NOT Included)**

NOTE: BP, PS, & SD4 models required a two gang box receptacle with Variable Controls.

SD2 models require a two gang box receptacle with a three position control; LOW / OFF / HIGH.

Electrical Requirements:

Power Feed 115 AC, 60 Hz, 15 Amp.

Properly Grounded Dedicated Branch Circuit.

Remote Controls Require Additional Grounded Romex Wiring that Connects the Remote Located Control Receptacle Box to the Control Wiring Leads that Exit the top of the unit. Two Wire Grounded Romex for Each Control. SD2 Models will have three wires per switch.



Finished Remote Controls

Ducting Considerations

Use a qualified installer to insure that all local installation, electrical and grounding codes are satisfied. Always refer to the specific installation instructions for your kitchen ventilation product.

The ducting should be installed with the shortest possible duct run and a minimum number of turns in the duct. Use of elbows and transitions can have a very significant effect on the recommended duct length.

Metal flex ducting is not recommended and in some areas is considered illegal due to the resistance of airflow caused by the irregular surface of the flex duct. If flex duct is used, count each foot of flex duct as two feet of regular metal duct in calculating the total duct run length.

A gradually tapered transition is required between different sizes of ducting.

Ventilation systems are less effective at higher altitudes. A reduction in the duct run of 20% is recommended at higher altitudes.

Placing two elbows or transitions next to each other can cause a significant reduction in performance. Always include a 24" straight section between any transitions if possible.

Don't use butt joints. Always use male/female connections with the male end pointing in the direction of the air flow.

Your kitchen ventilation system will work best if a source of "make-up" air is provided to replace the air being vented out. It may be a matter of simply opening the door between the kitchen and the rest of the home to let the air flow through.

Never end your duct run in an attic, garage or underneath your home.

The best performance will come from a short straight run exiting through the roof.

CALCULATIONS FOR ALL ISLAND AND WALL DUCT COVERS

FOR ANGLE CUT DUCT COVERS, MUST PROVIDE A DRAWING AND DIMENSIONS.

CEILING HEIGHT _____ (minus)

COUNTER HEIGHT = _____ (Usually 36") (minus)
(Floor to top of cook-top or stove)

MOUNTING HEIGHT = _____ 30" to 36" (minus)
(Top of cook-top or stove to bottom of range hood)

RANGE HOOD HEIGHT = _____

DUCT COVER HEIGHT = _____

Proud Supporters of:



***Special
Olympics***



ORANGE COUNTY
FIRE FIGHTERS ASSOCIATION



