

18-1/8" Depth, 6" High	MODEL
735± CFM 7" Round Duct	C2030BP-SS C2036BP-SS C2042BP-SS C2048BP-SS
880± CFM 8" Round Transition	C2030BP-8-SS C2036BP-8-SS C2042BP-8-SS C2048BP-8-SS
990± CFM 10" Round Transition	C2030BP-K-SS C2036BP-K-SS C2042BP-K-SS C2048BP-K-SS

FEATURES:


- Variable Controls
- Sones: 1.5 to 4.6
- Filters: Aluminum Mesh
- Front Panel Lighting: LED Bulb Included.
- Electrical: 115 AC, 60 Hz, 9 Amps. Suggested use with 15 Amp Circuit
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.

Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- Flange for the perfect fit.
- Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.

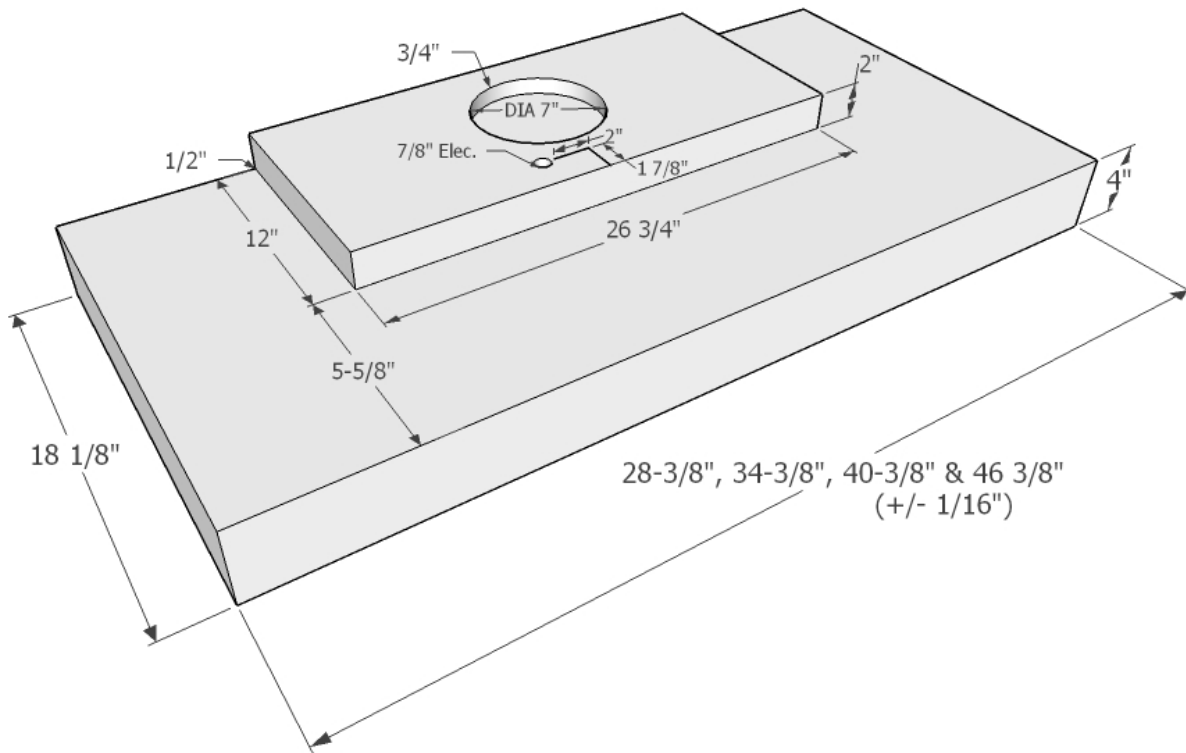

TRANSITION

Example: C2036BP-8

Vent Size 8" Round x 3-1/2" High



Example: C2042BP-K

Vent Size 10" Round x 7" High



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.