

18-1/8" Depth, 10" High	MODEL
◆ 540± CFM	C2030BP1B-SS
◆ 7" Round Duct, 4.25" Off Center	C2036BP1B-SS
	C2042BP1B-SS




FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled.
Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- ◆ Flange for the perfect fit.
- ◆ Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.

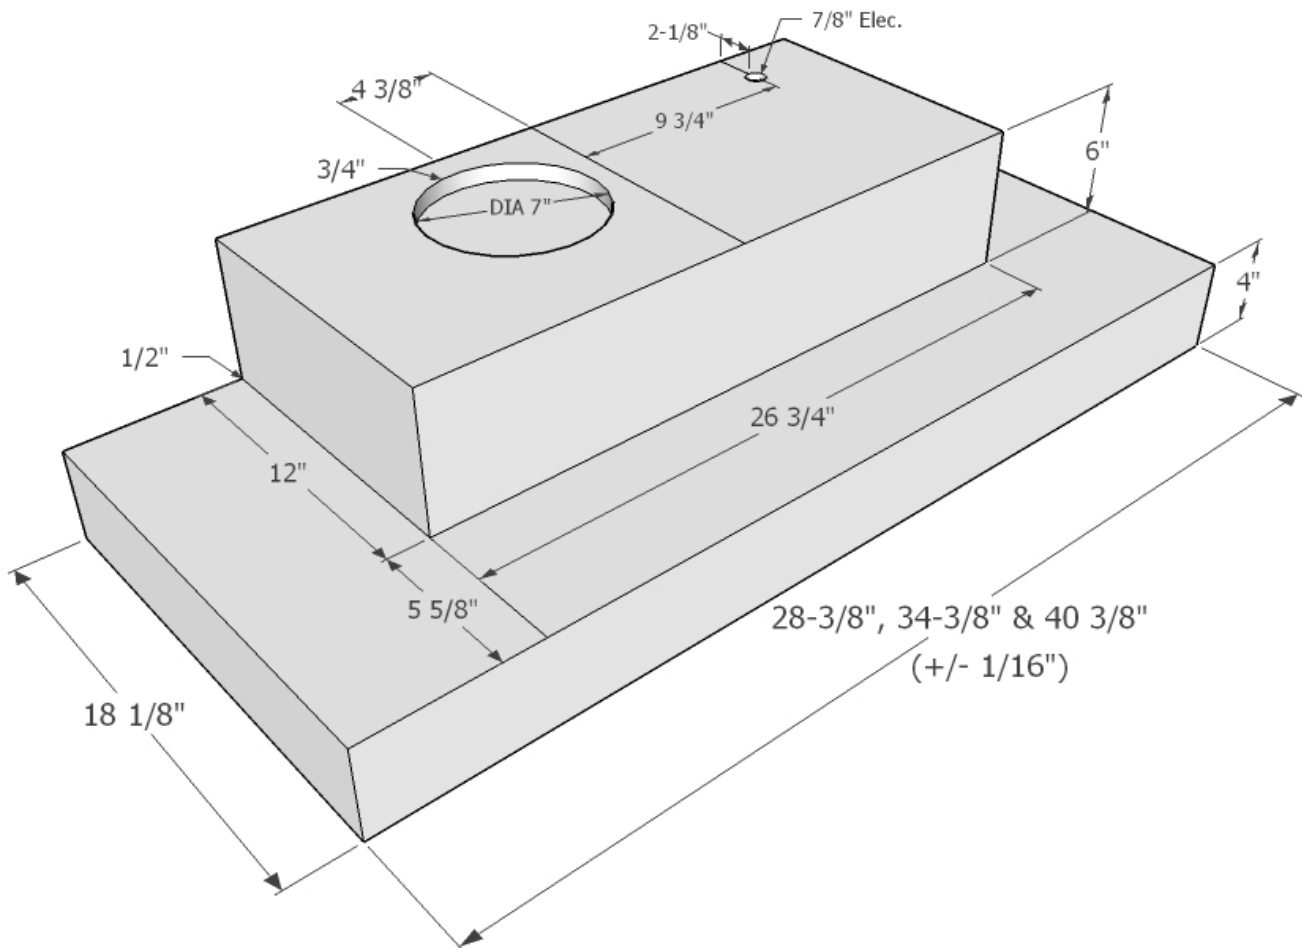

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.