

32-1/2" Depth, 12" High	MODEL
◆ 675± CFM ◆ 7" Round Duct Order duct cover separately. Provide height needed.	ISP1936PSSB-SS ISP1942PSSB-SS ISP1948PSSB-SS ISP36-STK-SS ISP42-STK-SS ISP48-STK-SS
◆ 810± CFM ◆ 8" Round Transition Order duct cover separately. Provide height needed.	ISP1936PSSB-8-SS ISP1942PSSB-8-SS ISP1948PSSB-8-SS ISP36-STK-SS ISP42-STK-SS ISP48-STK-SS



FEATURES:


- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Slim Baffle
- ◆ Front Panel Lighting: LED bulbs Included.
- ◆ Heat Controlled Thermostat, Fire Safety Controls. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:

- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote wiring, see accessories.
- ◆ Black or White Powder Coat, additional charge.
Ex: ISP1936PSSB-WH (White)
- ◆ Matte Black, additional charge.
Ex: ISP1936PSSB-MB (Matte Black)
- ◆ Custom Sizes Available.

NO Performance Warranty over BBQ Grills/Griddles.

NO Returns on Matte or RAL colors.

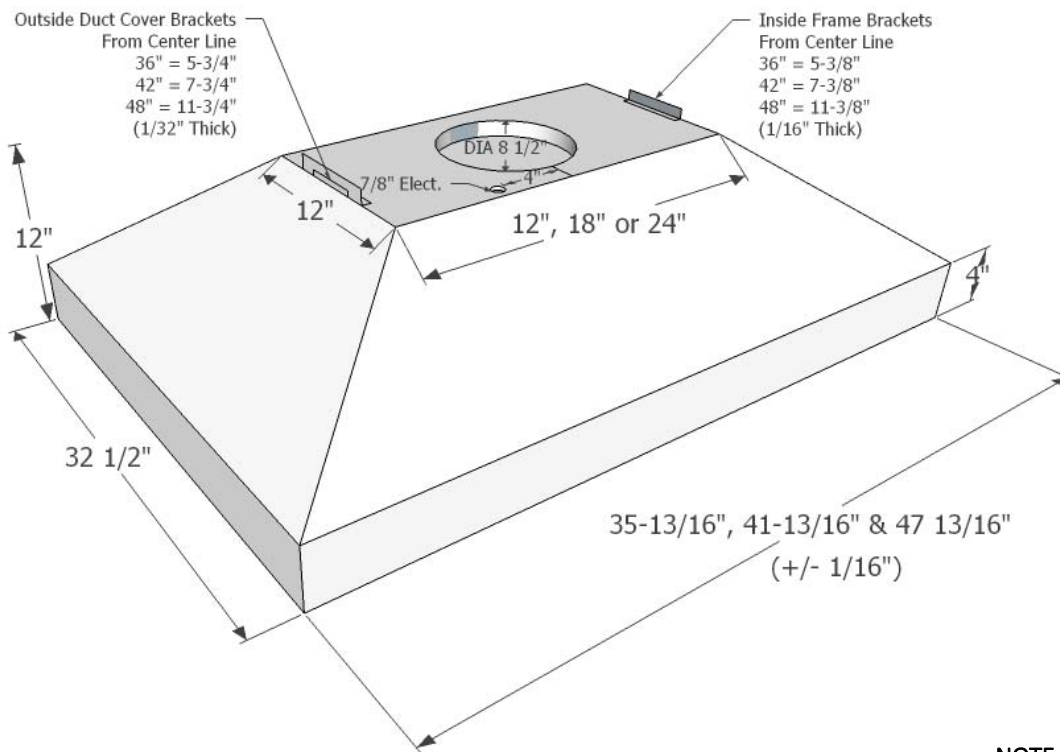

8" Transition
8" Round x 3-1/2" high



Wood Mounting Frame & Duct Cover



NOTE: Duct Cover Depth & Width

Depth: 11-5/8" All Sizes

Width : 36" = 11-3/4", 42" = 17-3/4", 48" = 23-3/4"

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.