

| 22" Depth, 6" High                                                                                             | MODEL<br>Stainless                                                   | MODEL<br>(Choose Color)                                                                      |
|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>◆ 675± CFM @ 1.5 to 4.6 Sones</li> <li>◆ 7" Round Duct</li> </ul>       | N1930PSSB-SS<br>N1936PSSB-SS<br>N1942PSSB-SS<br>N1948PSSB-SS         | N1930PSSB-BL or WH<br>N1936PSSB-BL or WH<br>N1942PSSB-BL or WH<br>N1948PSSB-BL or WH         |
| <ul style="list-style-type: none"> <li>◆ 810± CFM @ 1.5 to 4.6 Sones</li> <li>◆ 8" Round Transition</li> </ul> | N1930PSSB-8-SS<br>N1936PSSB-8-SS<br>N1942PSSB-8-SS<br>N1948PSSB-8-SS | N1930PSSB-8-BL or WH<br>N1936PSSB-8-BL or WH<br>N1942PSSB-8-BL or WH<br>N1948PSSB-8-BL or WH |




## FEATURES:

- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls.
- ◆ Filters: Slim Baffle
- ◆ Center Panel Lighting: LED bulb included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

## OPTIONS:

- ◆ Matte Black, additional charge.  
Ex: N1930PSSB-MB (Matte Black)
- ◆ Remote wiring, see accessories.

**NO Returns on Matte or RAL colors.**

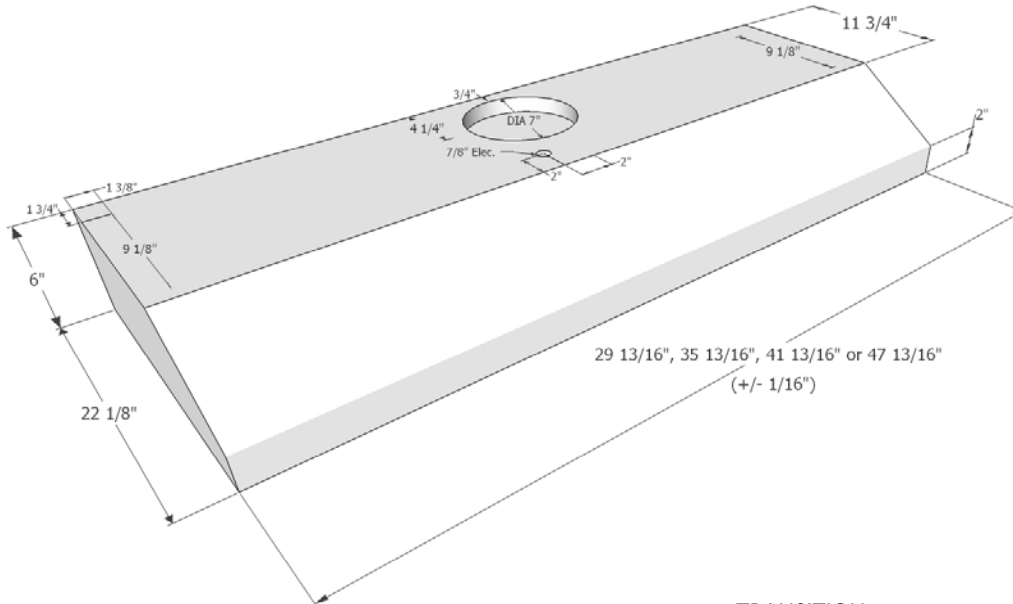

TRANSITION

Example: N1930PSSB-8-SS  
Vent Size 8" Round x 3-1/2" High



**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!**

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.