

24" Depth, 14" High	MODEL
◆ 675± CFM ◆ 7" Round Duct Order duct cover separately. Provide height needed.	WHP1936PSSB-SS
◆ 810± CFM ◆ 8" Round Transition Order duct cover separately. Provide height needed.	WHP1936PSSB-8-SS
◆ 900± CFM ◆ 10" Round Transition Order duct cover separately. Provide height needed.	WHP1936PSSB-K-SS



FEATURES:


- ◆ 304 Marine Grade Stainless Steel.
- ◆ Variable Controls.
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: 36" - Slim Baffles
- ◆ Front Panel Lighting: LED Bulbs Included.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 36" above cooking surface.

OPTIONS:

- ◆ Angle cut duct covers additional charge. Must provide drawing and dimensions.
- ◆ Remote wiring, see accessories.
- ◆ Black or White Powder Coat, additional charge.
Ex: WHP1936PSSB-8-WH (White)
- ◆ Matte Black, additional charge.
Ex: WHP1936PSSB-8-MB (Matte Black)
- ◆ Custom Sizes Available.

NO Performance Warranty over BBQ Grill/Griddle.

NO Returns on Matte or RAL colors.

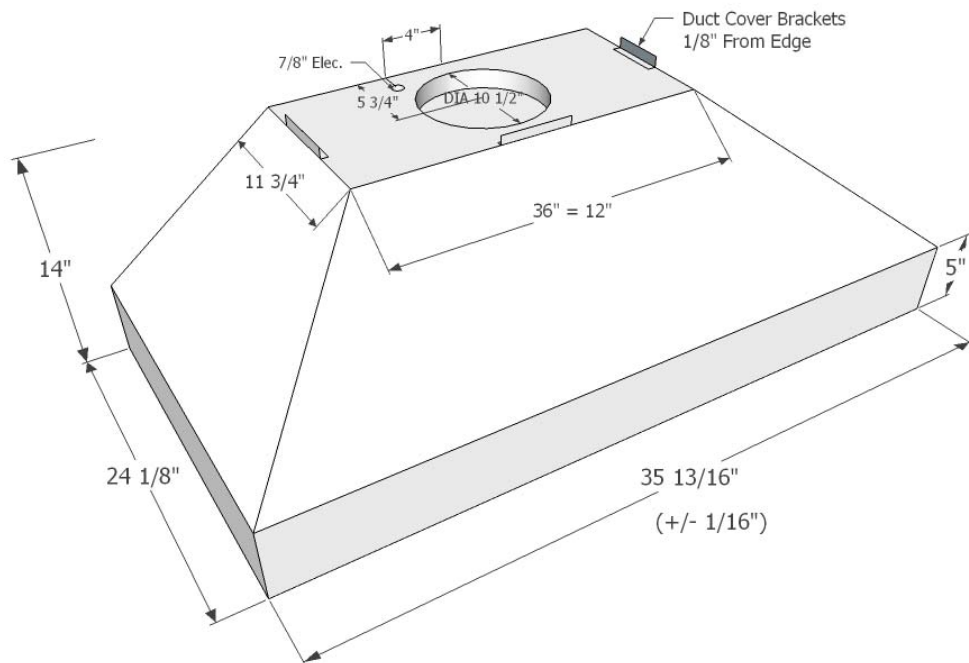

TRANSITION

Example: WHP1936PSSB-8
Vent Size 8" Round x 3-1/2" High



Example: WHP1936PSSB-K
Vent Size 10" Round x 7" High



NOTE: Duct Cover Depth & Width
Depth: 11-5/8" All Sizes
Width / Single Duct: 36" = 11-3/4"



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.